


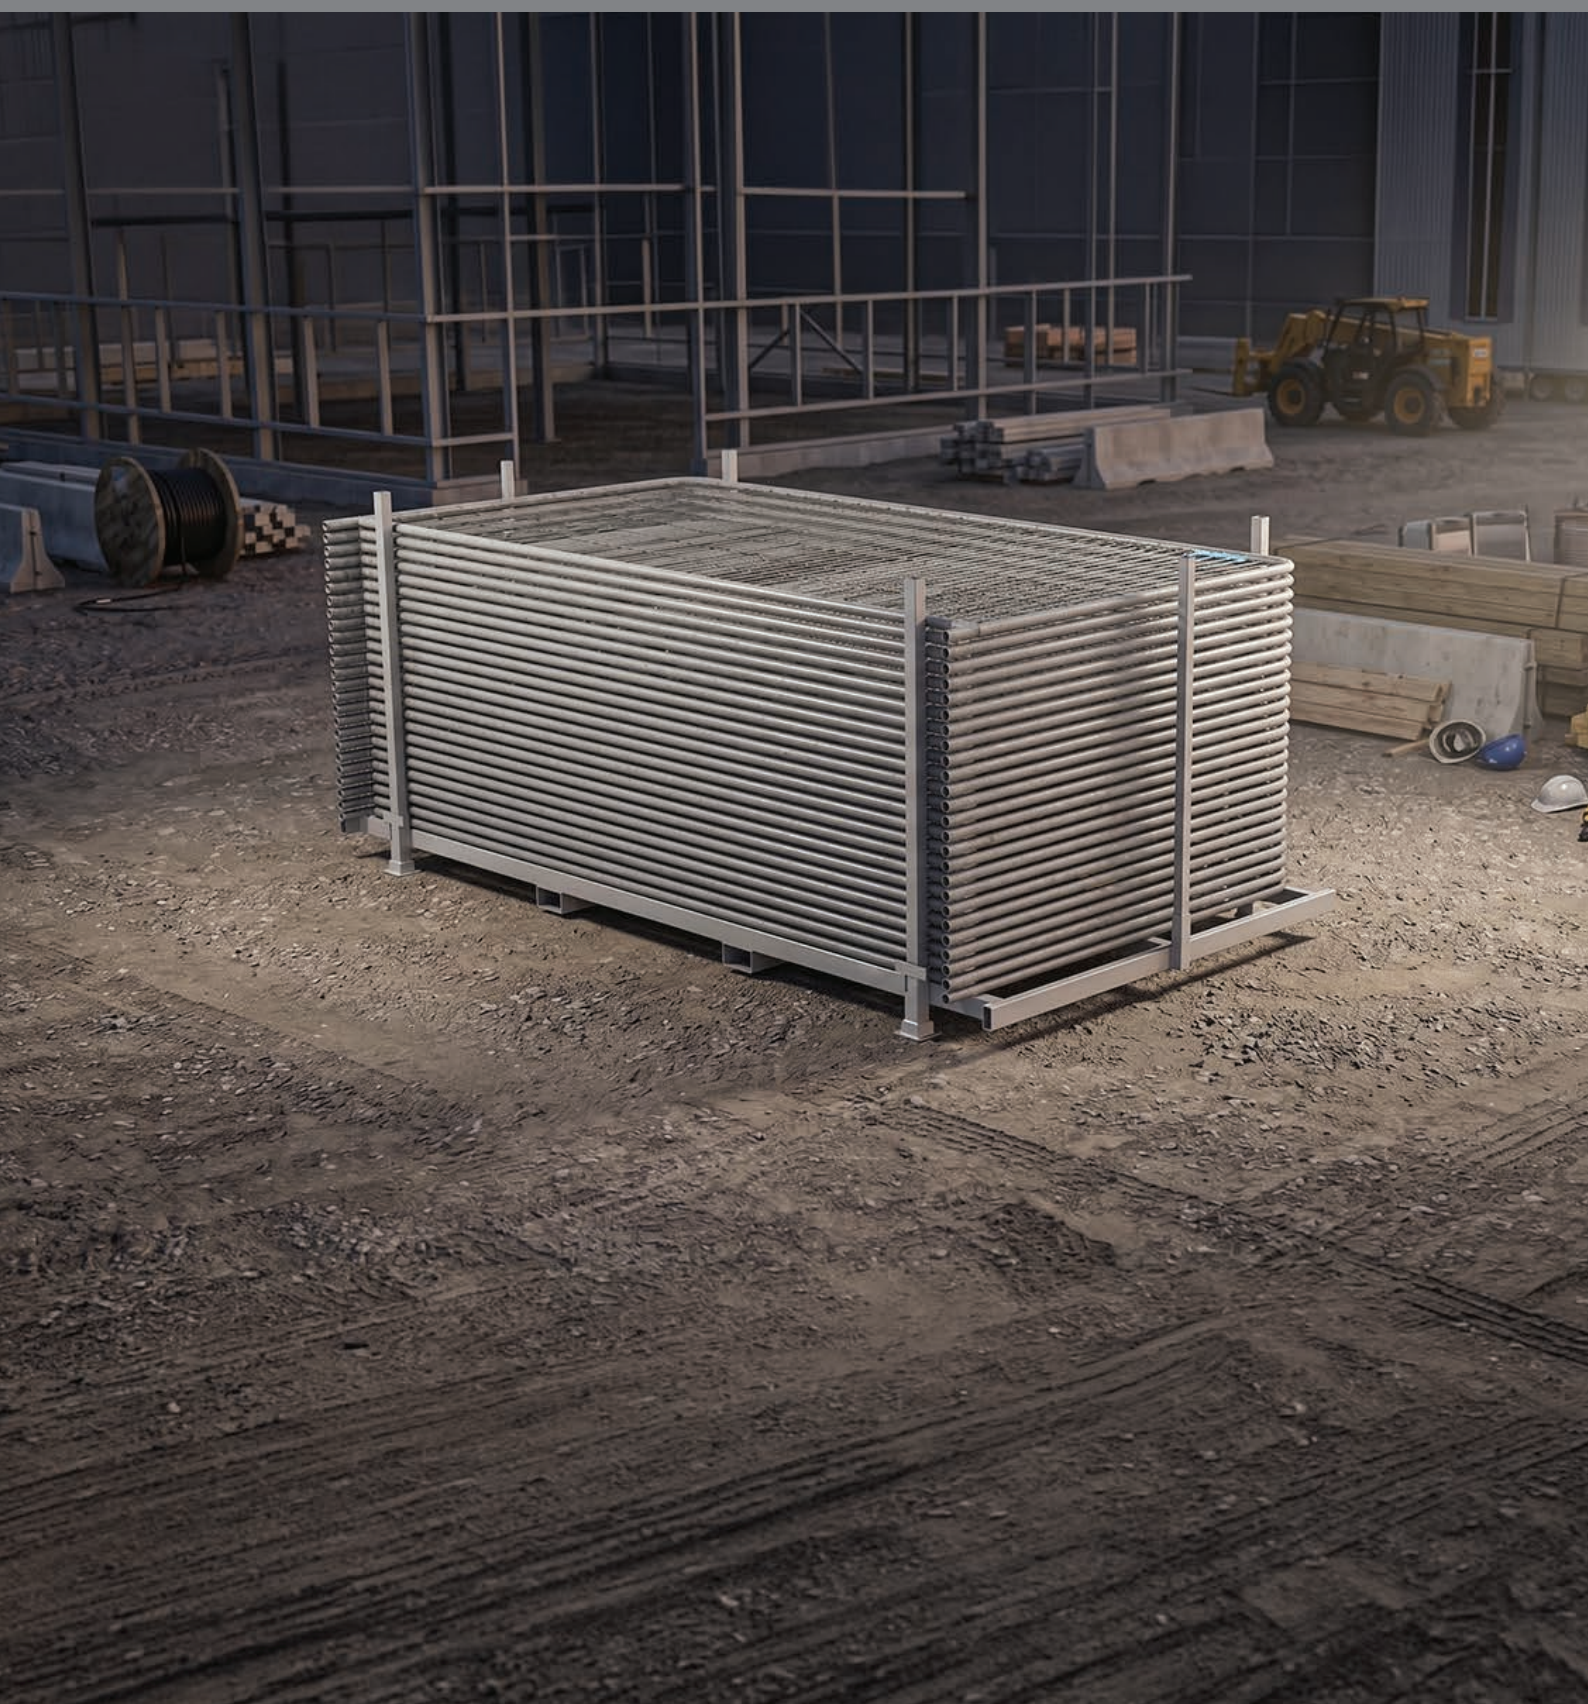

Call our Expert Sales Team for more information.

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA
01283 512 111 | www.firstfence.co.uk | sales@firstfence.co.uk

Raw Strength, Unmatched Efficiency!

Engineered for demanding environments like construction sites, events, and hire depots, our heavy-duty temporary fencing stillages streamline storage and transport. Built from robust, self-coloured steel, this high-capacity solution withstands rigorous daily handling. The stackable, forklift-ready design reduces loading times, prevents on-site damage, and keeps your inventory organized and ready for deployment.

Key Features

- ⦿ **Heavy Duty Steel Construction**
(Provides maximum structural rigidity to handle the weight of multiple panels)
- ⦿ **Space-Saving Storage**
(Engineered to securely hold and organise large volumes of temporary fencing panels)
- ⦿ **Stackable & Forklift-Ready Design**
(Structural layout for safe vertical stacking and easy forklift access)
- ⦿ **Enhanced Equipment Protection**
(Prevents unnecessary wear and tear keeping panels safe during transit and storage)
- ⦿ **Built for Industrial Environments**
(Designed to withstand daily use, rough handling & high-impact site conditions)

Suitable For

- ⦿ Construction & Demolition Sites
- ⦿ Event Management & Festival Infrastructure
- ⦿ Equipment & Tool Hire Depots
- ⦿ Civil Engineering & Infrastructure Projects
- ⦿ Industrial Warehousing & Storage Yards

Stillage can be used with:

- 30 UK specification square or round top panels
- 28 Euro standard specification square panels
- 27 Euro HD specification square panels



Space-saving design

This product can be folded flat when not in use. The vertical posts can be removed and stored flat within the frame. The 40x40 posts sit securely in a channel to allow low-profile stacking when the stillage is empty.

Technical Specifications

Technical Attribute	Specification Details
Product Title	Heavy Duty Temporary Fencing Stillage
Product Code	STIL-GEN-0006
Material Finish	Self-Coloured Structural Steel
Unit Weight	174kg
Overall Length	3770mm
Overall Width	1883mm

Technical Attribute	Specification Details
Stillage Frame Size	3670 x 1833mm
Fork Pocket Spacing	920mm (internal)/1550mm (Outer edge to outer edge)
Fork Pocket Entry Height	154mm
Base Frame Profiles	HD 50x50x3x1500mm Square Hollow Section
Vertical Post Profiles	HD 40x40x3x1450mm Square Hollow Section
Socket Configurations	HD vertical retention sockets (1x50x50, 2x60x60, and 2x60x60 clamped vertical sockets)



Call our Expert Sales Team for more information.