

Roll Top Mesh (Safetop) Fencing Panels




Panel Features

- Triangular beams at the top and bottom of the panel offer extra rigidity
- "Spike-free" panel design
- 3.0m wide panels, reducing installation and post costs by up to 20% when compared to 2.50m wide panels
- Range of heights available from 900mm to 1800mm
- Produced from 4.50mm diameter Galvanised wire to BS EN 10244-2:2009 class D
- "Cut-outs" on profiled section allow easy installation onto square box-section posts

Applications

- Schools and Nurseries
- Play areas
- Commercial and Industrial Sites
- Residential Areas
- Sports Facilities
- · Retail Areas
- Pedestrian and Passenger demarcation

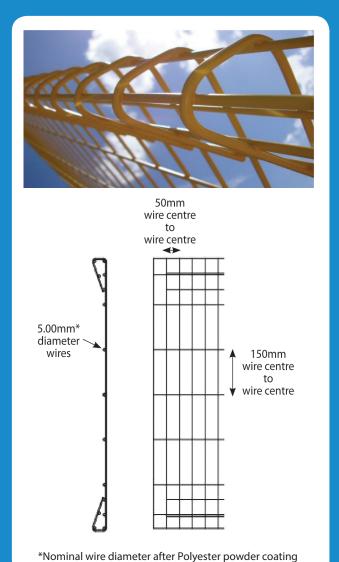

Nonlina wire diameter after rolyester powder coating



Safetop® Fencing Panels

Panel Specifications

4.50mm* vertical wires & 4.50mm* horizontal wires

Panel Dimensions (hxw) (mm)	Pallet quantities	Approx Panel Weight (kg)
900 x 3005	30	14.81
1200 x 3005	30	17.84
1500 x 3005	30	20.88
1800 x 3005	30	23.91

Note: maximum loading on 40ft curtain sided vehicle is 2 pallets high and 4 pallets down vehicle bed

Panel Finishes Available

Pre-Galvanised wires help protect the fencing from developing rust over time, this will also prevent lasting damage to the surface. For further protection a Polyester Powder Coating is added, this is an effective and more permanent finish which will also make the Mesh Fencing more prominent.







RAL 6005 Moss Green Jet Black

RAL 9005

RAL 7037 Grey

A wide range of additional colours are available, please contact the Sales Office for further details.



First Fence Ltd. Kiln Way, Woodville Swadlincote DE118EA

^{*} Wire diameters stated are prior to welding / coating and complies with the requirements of BS EN 10218-2:2012 T2