FirstFence®
HIRE & SALES

Badby Shelter

Specification Sheet

SPC-SHELTER-001A



Call our Expert Sales Team for more information.

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA
01283 512 111 | www.firstfence.co.uk | sales@firstfence.co.uk

FirstFence®
HIRE & SALES

Badby Shelter

Specification Sheet

SPC-SHELTER-001A

Galvanised Steel Shelters: Durability and Protection

Discover the perfect blend of strength and versatility with the Badby Galvanised Steel Shelter. Engineered to withstand the harshest weather conditions and deter potential vandalism, these heavy-duty, free-standing shelters offer reliable, low-maintenance protection for a wide variety of outdoor applications. Whether you need secure cycle storage, a comfortable passenger waiting area, trolley parking, or robust housing for wheelie bins and pay-and-display machines, the Badby shelter delivers uncompromising performance.

Available in a range of widths from 1m to 5m and featuring multiple configuration options—including open front, clad door, mesh door, and open front with PETG sheeting—this fully modular, bolt-down shelter can be perfectly tailored to meet the demands of your site.

Key Features

- Heavy-Duty Galvanised Steel Construction
  (Manufactured to ISO 1461 standards for rust & corrosion resistance)
- Versatile Sizing and Configurations
  (Available in multiple widths and front designs)
- Curved Water-Shedding Roof
  (Front-to-back curved design that prevents water pooling)
- Modular Kit-Form Assembly
  (A fully modular kit for easy on site building)
- Bolt-Down Format
  (Simply fixed to the ground with anchor bolts)

Suitable For

- Secure Cycle Storage
- Passenger Waiting Areas
- Retail Trolley Parking
- Machine & Equipment Housing
- Wheelie Bin Shelters



See the full steel shelters range here CLICK HERE

Choosing the Right Badby Shelter for Your Project

STEP 1: WHAT WILL THE SHELTER BE USED FOR?

Start by defining exactly what the shelter will be used for, as this will dictate the level of security and access you need.

Consider whether it will hold high-value items like bicycles, require easy push-in access for shopping trolleys, or serve as a sheltered waiting area for passengers.

STEP 2: SELECT THE FRONT CONFIGURATION

Open Front: Best for high-traffic passenger waiting areas, quick-access trolley parks, or low-risk cycle storage where ease of entry is the priority.

Open Front with PETG Sheet: Ideal for areas that require easy access but need extra transparent shielding against driving rain and wind.

Mesh Door: The top choice for secure cycle storage or wheelie bins. It provides lockable security and airflow while allowing you to see inside.

Clad Door: Offers maximum security and privacy, completely concealing the contents (perfect for high-value machinery or fully securing equipment).

STEP 3: CHOOSE YOUR BASE WIDTH

Measure your available space and determine the volume of items or people the shelter needs to accommodate. This style comes in five base widths:

1.0m or 2.0m: Compact footprints ideal for pay-and-display machines, small bin enclosures, or a handful of bikes.

3.0m or 4.0m: Medium-capacity options perfect for standard employee cycle parking or standard passenger waiting areas.

5.0m: Maximum single-bay capacity for heavy use, such as supermarket trolley bays or large commuter bike parks.

STEP 4: CHECK THE GROUND

This is a bolt-down system so the ground needs to be solid and level (typically concrete) and be capable of holding the heavy duty 140x140mm x 10mm base plates.

STEP 5: PLAN FOR EXPANSION

Does your shelter need to grow in the future?

This is a modular kit and can be easily extended with extension bays when needed.

Call our Expert Sales Team for more information.

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA
01283 512 111 | www.firstfence.co.uk | sales@firstfence.co.uk

FirstFence®
HIRE & SALES

Badby Shelter

Specification Sheet


SPC-SHELTER-001A

Technical Specifications

PRODUCT	HEIGHT	DEPTH	WIDTH OPTIONS	FRONT STYLE	CLADDING STYLE	GROUND FIXING
Badby Shelter	2363mm Overall Height 2096mm Clearance Height	2099mm	1, 2, 3, 4 & 5m	Open Fronted Clad Door Mesh Door Open Fronted (PETG Sheet)	Galvanised Steel or PETG Sheet	Bolt Down

Additional Specifications

Standards: Galvanised to ISO 1461 | 1-Year Manufacturer's guarantee

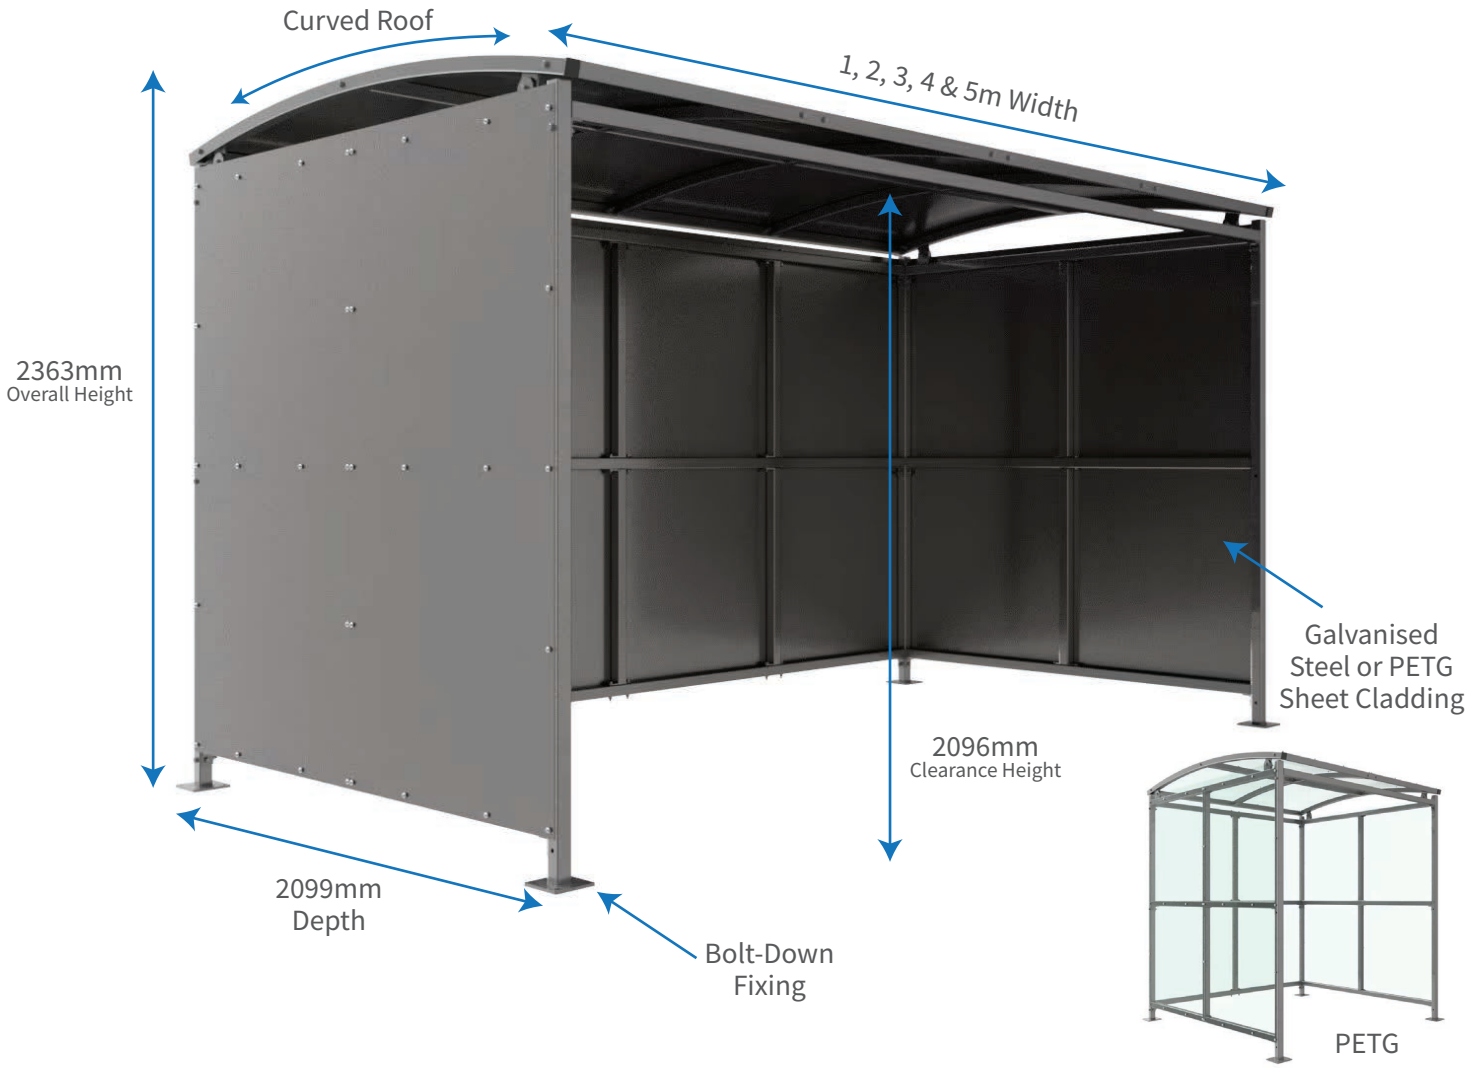

Call our Expert Sales Team for more information.

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA
01283 512 111 | www.firstfence.co.uk | sales@firstfence.co.uk

FirstFence®
HIRE & SALES

Badby Shelter

Specification Sheet

SPC-SHELTER-001A

Badby Shelter Styles



Badby Shelter
Open Fronted



Badby Shelter
Clad Door



Badby Shelter
Mesh Door



Badby Shelter
PETG Sheet

Call our Expert Sales Team for more information.

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA
01283 512 111 | www.firstfence.co.uk | sales@firstfence.co.uk