
FirstFence® HIRE & SALES


DATA SHEET


Rugged steel barriers for traffic delineation.

BARRIERS

	FORTIS
PRODUCT CODE	1.5FHDSB
WL	1500MM
W	510MM
H	443MM
TL	1584MM
REFLECTIVE PANEL	1200 X 240
PIN	X 1
WEIGHT E / F (KG)	58
PER PALLET	3
PER FULL LOAD	144
MATERIAL	STEEL POWDER COATED
COLOUR	RED / WHITE
CALCULATED WIND SPEED	

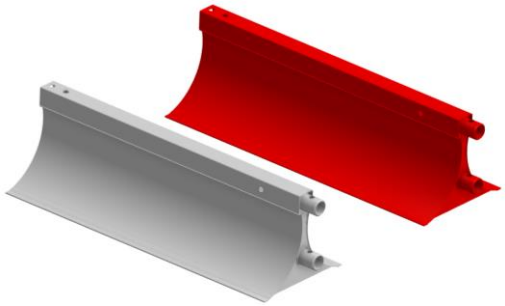

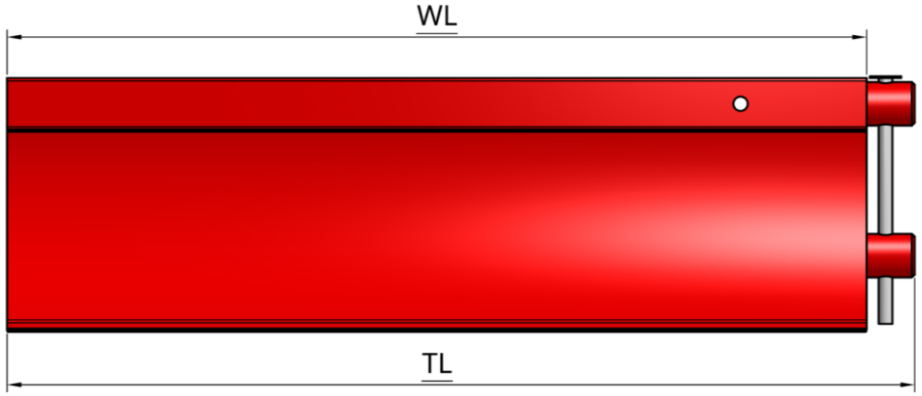

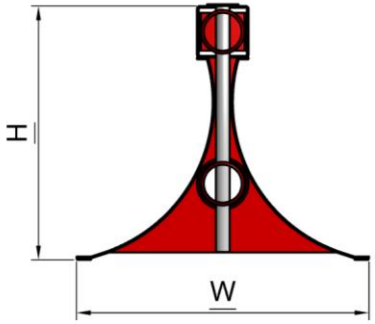


Rugged steel barriers for traffic delineation.


ACCESSORIES

MINI MESH

PRODUCT CODE	FPMP
D	38.1MM
L	1451MM
H	564MM
TH	1007MM
WEIGHT (KG)	5.2
PER PALLET	52
MATERIAL	STEEL GALV / POWDER COATED
COLOUR	GALV / RED / WHITE
CALCULATED WIND SPEED	



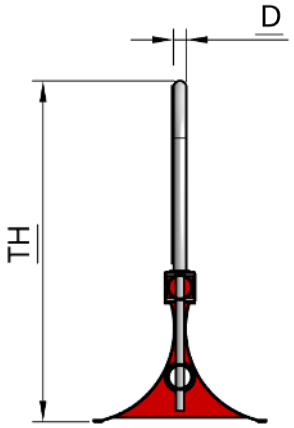

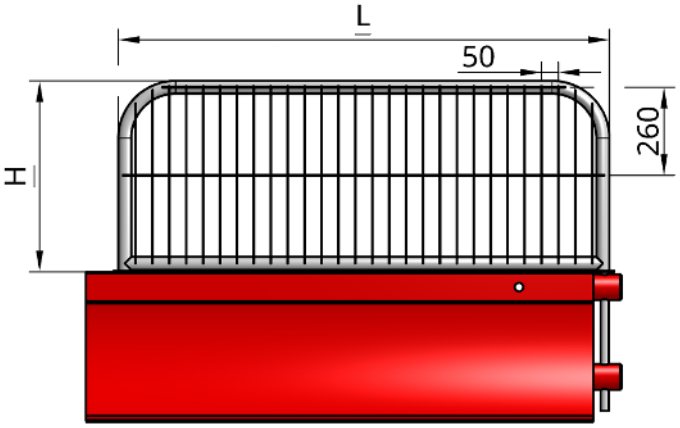

FirstFence® HIRE & SALES


DATA SHEET
3 / 9


Rugged steel barriers for traffic delineation.


ACCESSORIES

LARGE MESH

PRODUCT CODE	2MMFHDHMP
D	38.1MM
W	2954MM
H	1560MM
TH	2003MM
WEIGHT (KG) PER PALLET	
MATERIAL	STEEL GALV / POWDER COATED
COLOUR	GALV / RED / WHITE
CALCULATED WIND SPEED	

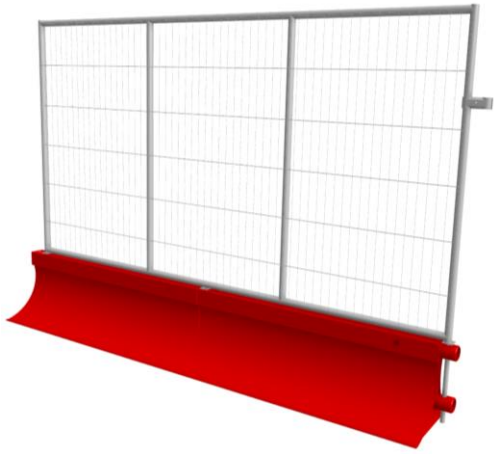

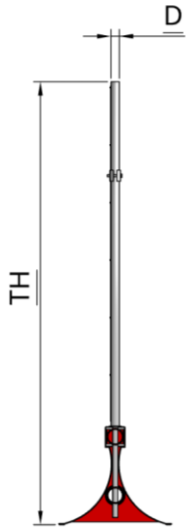


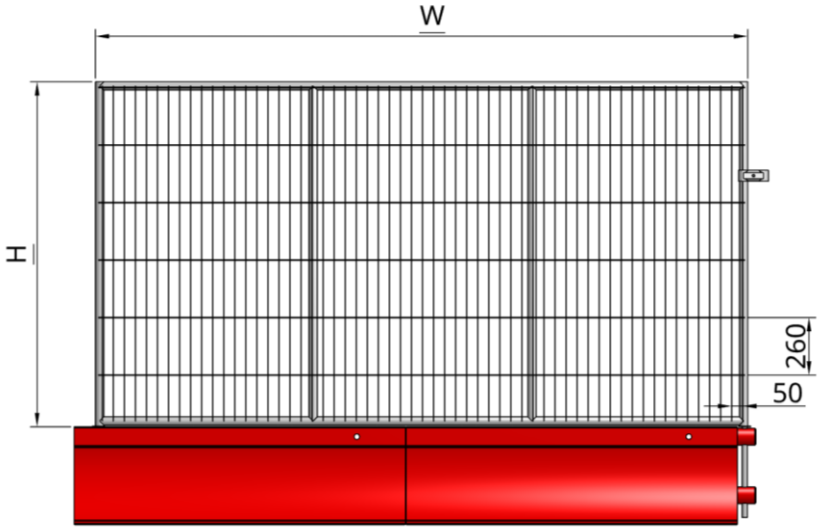



Rugged steel barriers for traffic delineation.

ACCESSORIES

	CORNER FEMALE	CORNER MALE
PRODUCT CODE		
WL	1543MM	1550MM
W	510MM	510MM
H	443MM	443MM
TL	1554MM	1655MM
MAX ANGLE	45 DEG	45 DEG
PIN	X 1	X 1
WEIGHT (KG)		
PER PALLET	1 X PAIR	1 X PAIR
MATERIAL	STEEL POWDER COATED	STEEL POWDER COATED
COLOUR	RED / WHITE	RED / WHITE
CALCULATED WIND SPEED		

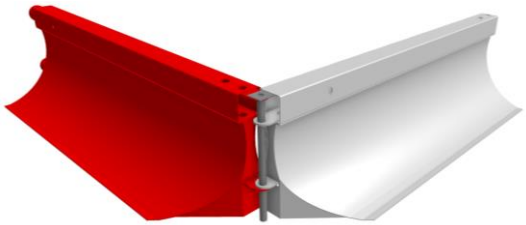



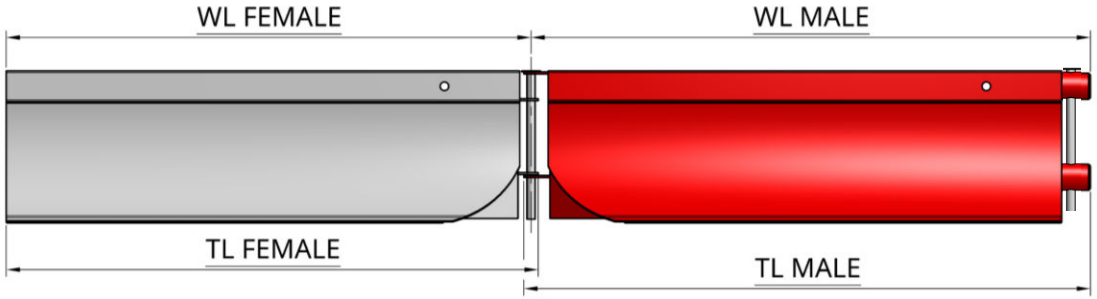


FirstFence® HIRE & SALES


DATA SHEET
5 / 9


Rugged steel barriers for traffic delineation.

ACCESSORIES

	MINI MESH	CORNER MINI MESH (fits male)
PRODUCT CODE	FPMP	
D	38.1MM	38.1MM
L	1451MM	1531MM
H	564MM	564MM
TH	1007MM	1007MM
WEIGHT (KG)	5.2	
PER PALLET		
MATERIAL	STEEL GALV / POWDER COATED	STEEL GALV / POWDER COATED
COLOUR	GALV / RED / WHITE	GALV / RED / WHITE
CALCULATED WIND SPEED		

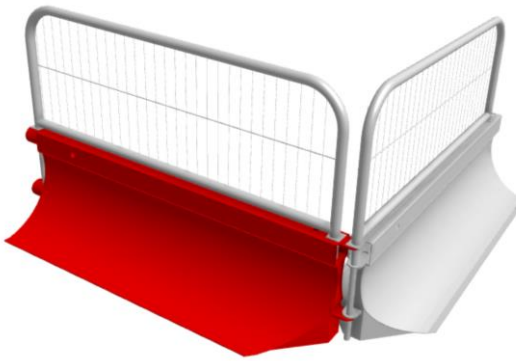

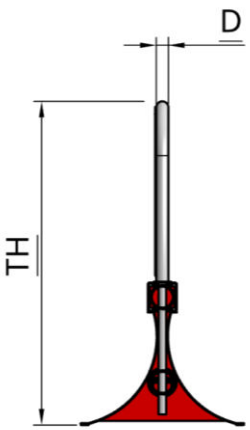

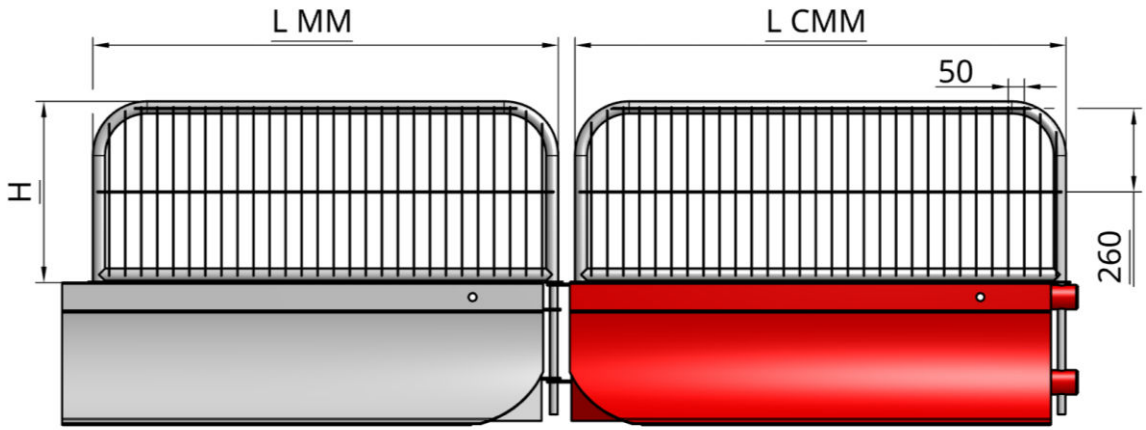


FirstFence® HIRE & SALES


DATA SHEET
6 / 9


Rugged steel barriers for traffic delineation.

ACCESSORIES

	LARGE MESH	CORNER LARGE MESH (Fits male)
PRODUCT CODE	2MFHDHMP	
D	38.1MM	38.1MM
L	2954MM	3034MM
H	1560MM	1560MM
TH	2003MM	2004MM
WEIGHT (KG) PER PALLET		
MATERIAL	STEEL GALV / POWDER COATED	STEEL GALV / POWDER COATED
COLOUR	GALV / RED / WHITE	GALV / RED / WHITE
CALCULATED WIND SPEED		

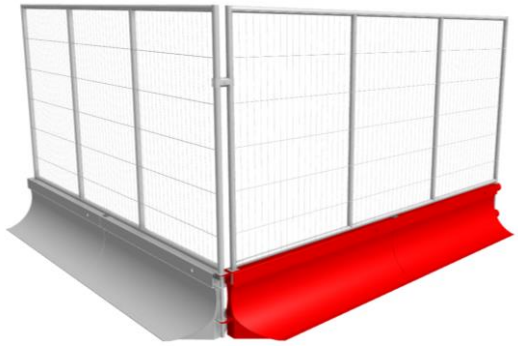

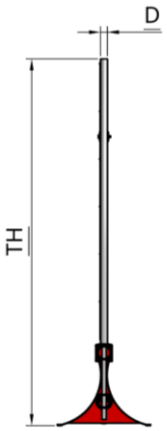

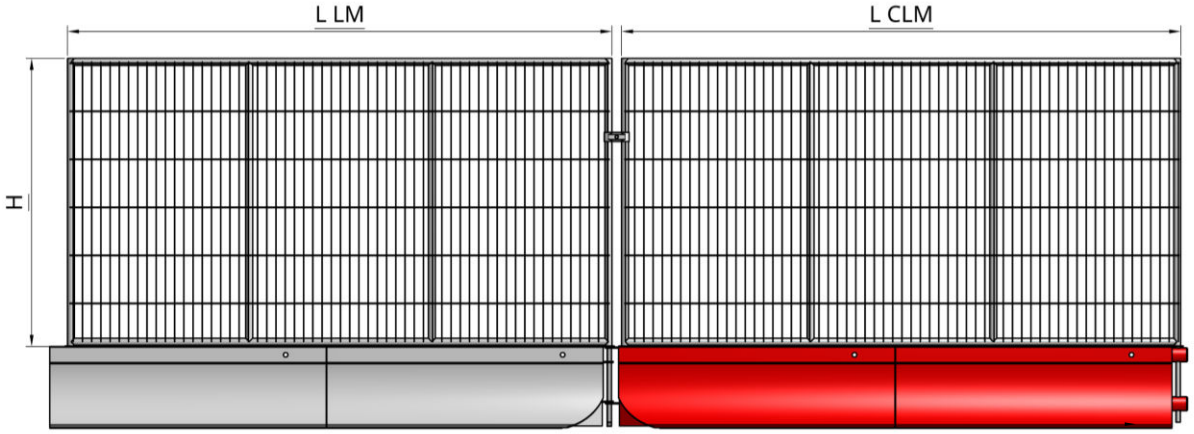

FirstFence® HIRE & SALES


DATA SHEET 7 / 9


Rugged steel barriers for traffic delineation.

ACCESSORIES

4M VEHICLE GATE

PRODUCT CODE	
D	38.1MM
VG SPACE	4231MM
VG L	4038MM
TH	2019MM
FLAG	X 1
CLIPS	X 6
WEIGHT (KG) PER PALLET	
MATERIAL	STEEL GALV / POWDER COATED
COLOUR	GALV / RED / WHITE
CALCULATED WIND SPEED	

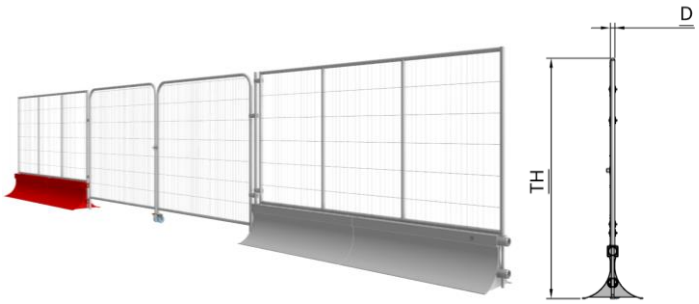

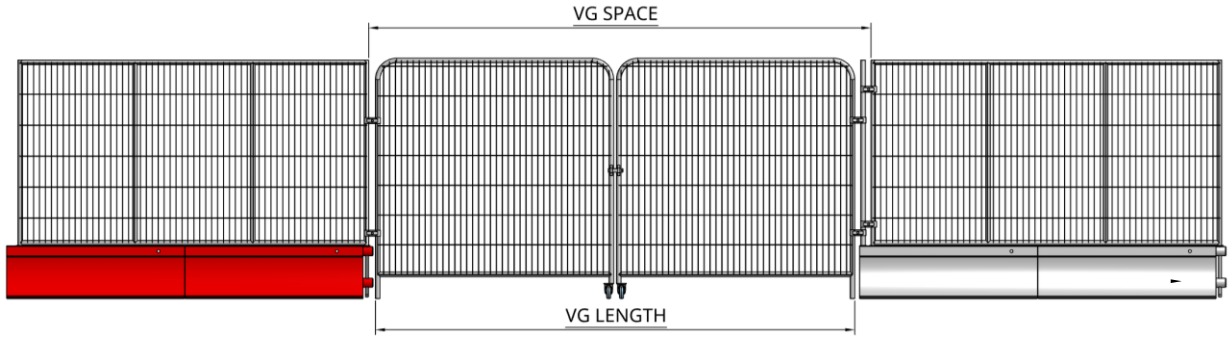

FirstFence® HIRE & SALES


DATA SHEET
8 / 9


Rugged steel barriers for traffic delineation.


ACCESSORIES

PED GATE

PRODUCT CODE	
D	38.1MM
PG SPACE	1169MM
PG L	980MM
TH	2068MM
FLAG	X 1
CLIPS	X 6
WEIGHT (KG) PER PALLET	
MATERIAL	STEEL GALV / POWDER COATED
COLOUR	GALV / RED / WHITE
CALCULATED WIND SPEED	

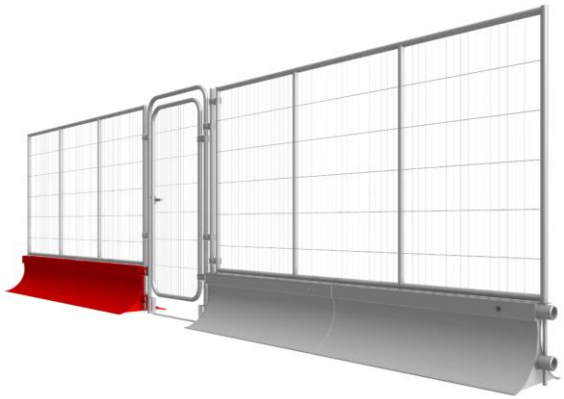

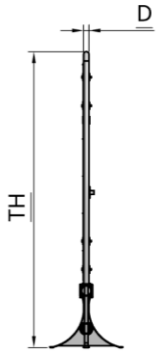

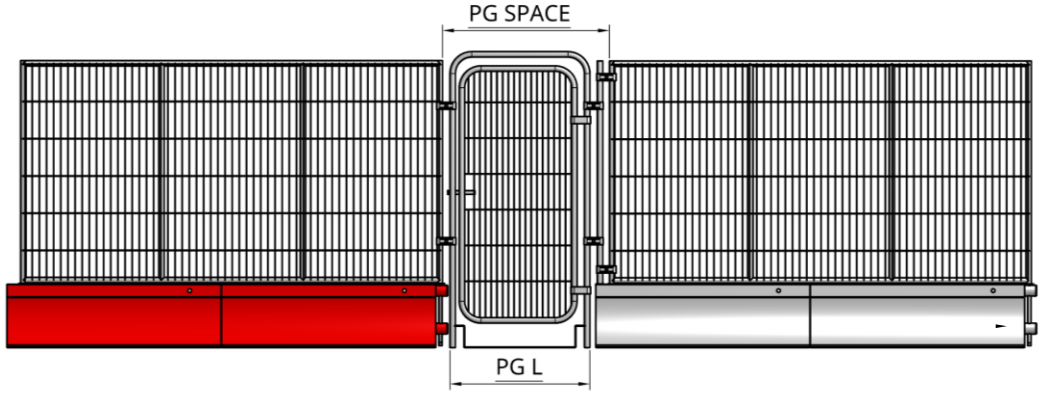

FirstFence® HIRE & SALES


DATA SHEET
9 / 9


Rugged steel barriers for traffic delineation.

ACCESSORIES

	FORTIS END FEMALE	FORTIS END MALE
PRODUCT CODE		
WL	510MM	514
W	510MM	510MM
H	443MM	443MM
TL	510MM	587MM
WEIGHT (KG)		
PIN		X 1
PER PALLET	1 X PAIR	1 X PAIR
MATERIAL	STEEL POWDER COATED	STEEL POWDER COATED
COLOUR	RED / WHITE	RED / WHITE
CALCULATED WIND SPEED		

FEMALE **MALE**

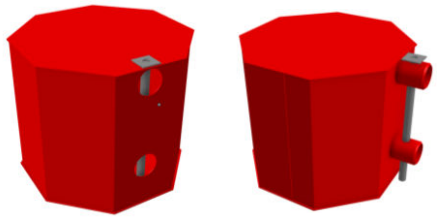

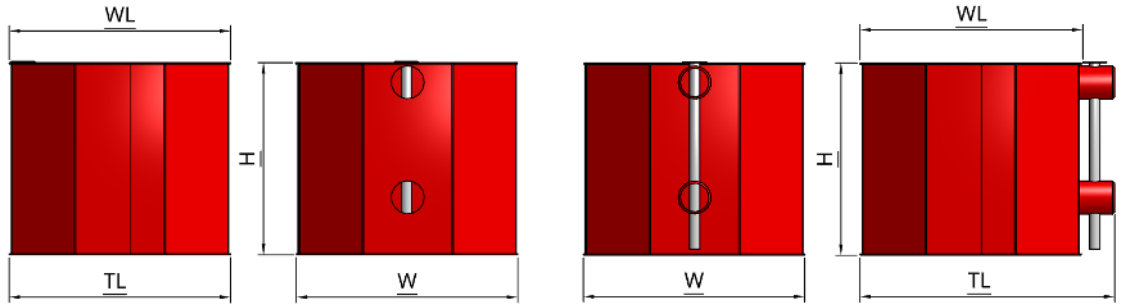

WARNING: FAILURE TO FOLLOW THESE GUIDLINES COULD RESULT IN INJURY OR DEATH

Oaklands Group always recommends that a site survey and a full risk assessment must be carried out before using the equipment.

It is the responsibility of the end user to make sure the system is suitable for their intended use. The system must be installed by an experienced and competent person and inspected regularly.

1. Tipping and sliding values, where provided, are as guide only and It is the customers responsibility to ensure the barrier and fencing system selected is suitable for their specific location.
2. The system should be installed on a flat, level surface.
3. Water ballast must be added to the correct level as indicated in the data sheet.
4. Water ballast level must be regularly checked and maintained to the fill level.
5. Connecting steel work and fencing systems must be regularly inspected for cracks of faults and replaced if faulty.
6. Connecting steel work fasteners must be regularly inspected for tightness.
7. In unsupported areas such as gates addition ballast may be required