



DO NOT SCALE DRAWING

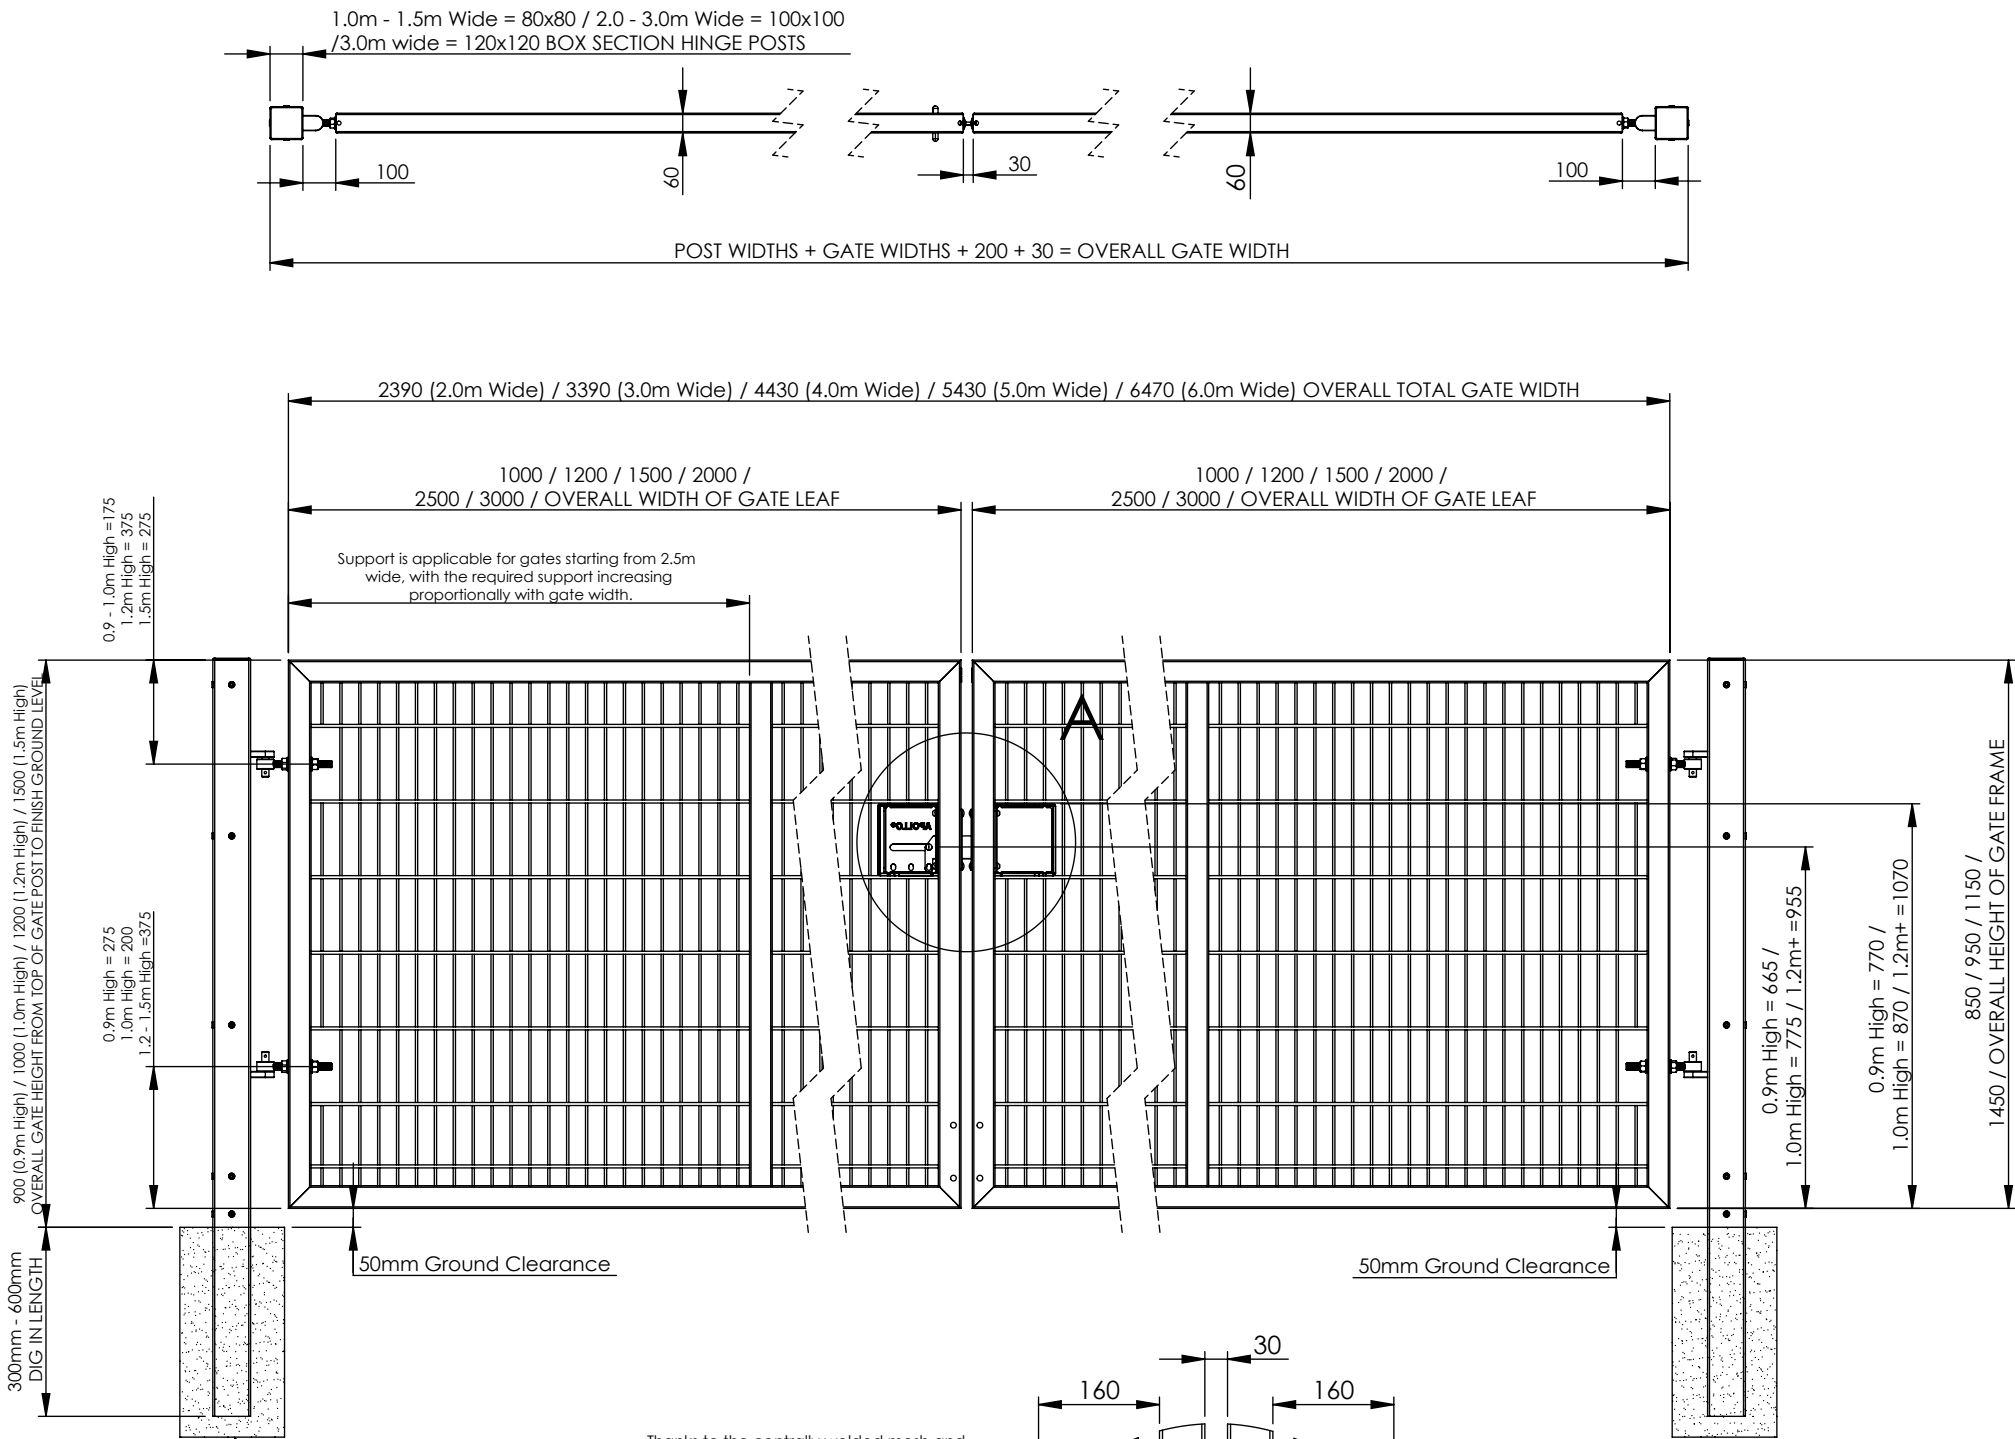

Thanks to the centrally welded mesh and the ability to mount the lock kit on either side, these kits provide maximum flexibility for various gate configurations.

C20/25 MINIMUM CONCRETE FOUNDATION GRADE

The Apollo Lock Kits offer a universal solution for gate installations, allowing both right-hand and left-hand hanging.

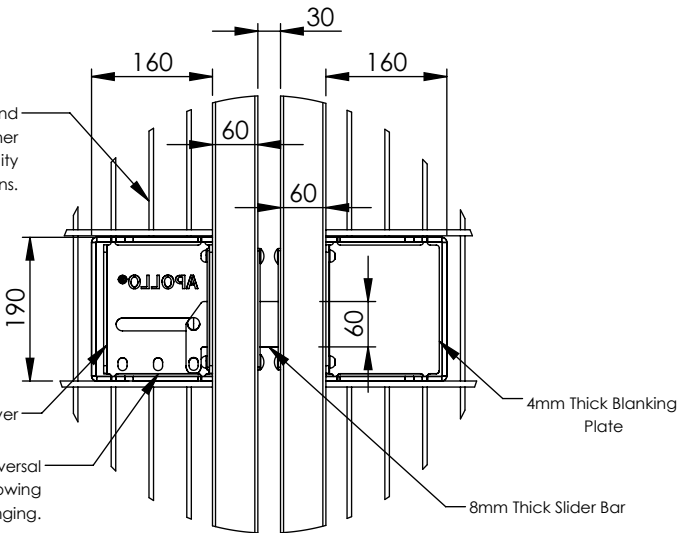


DETAIL A


Notes:

1. All materials to be mild steel and conform to relevant British standards.
2. All items to be pre-galvanised to BS EN 10346 or hot dip galvanised to ISO 1461.
3. Items can be powder coated on request, powder coating to : BS EN 13438
4. installation via R.A.M.S

ALL GATE HINGE POST & GATE LEAFS HAVE A Ø13 FOR A GATE RESTRAINER TO BE FITTED APON PURCHASE

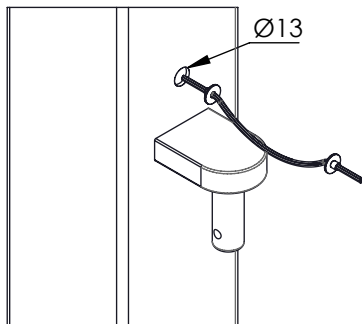

ALL GATES TO COME WITH UNISLIDE DOUBLE SLIDER KIT

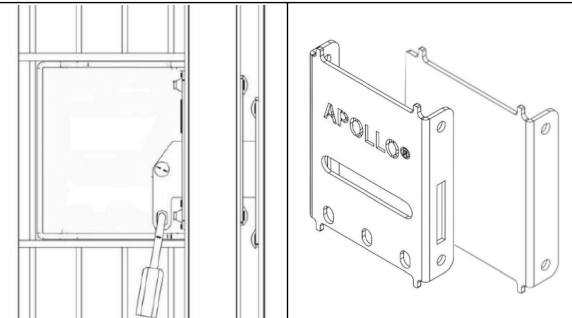




PART A
UNI-KIT-0500
Unislide Double Slider
Padlockable Gate Kit

PART B
APOL-ACC-0800
Apollo® Double Slider
Plate Kit

Other Lock Kits are available on request
(Click here for more information)

All gates come with 18mm Eye Bolts. Hinge posts are to be fitted with 2 x M18 eye bolts.

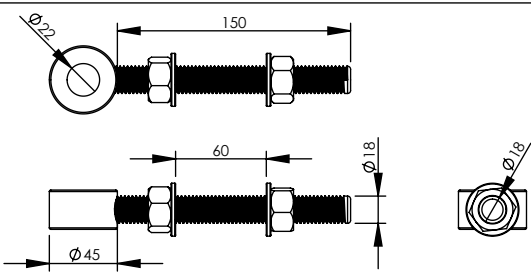


		NAME		DATE		<div>First Fence[®] — HIRE & SALES —</div>			
DRAWN		W.P		29/05/2025					
APV'D									
Tolerance	0 - 50mm		± 0.2mm		SKU: APOLLO[®]				
	> 50 - 500mm		± 1mm						
	>1000mm		± 3mm						
		Third Angle Projection				TITLE: APOLLO [®] 0.9m x 1.5m High - 2.0m x 6.0m WIDE DOUBLE LEAF DIG IN GATE KIT RANGE DRAWING			
Material:		Steel				REV A			
						A3			
WEIGHT:		N/A				SCALE: N/A		SHEET 1 OF 2	

FirstFence®
HIRE & SALES

APOLLO®

REV
A
A3

DO NOT SCALE DRAWING

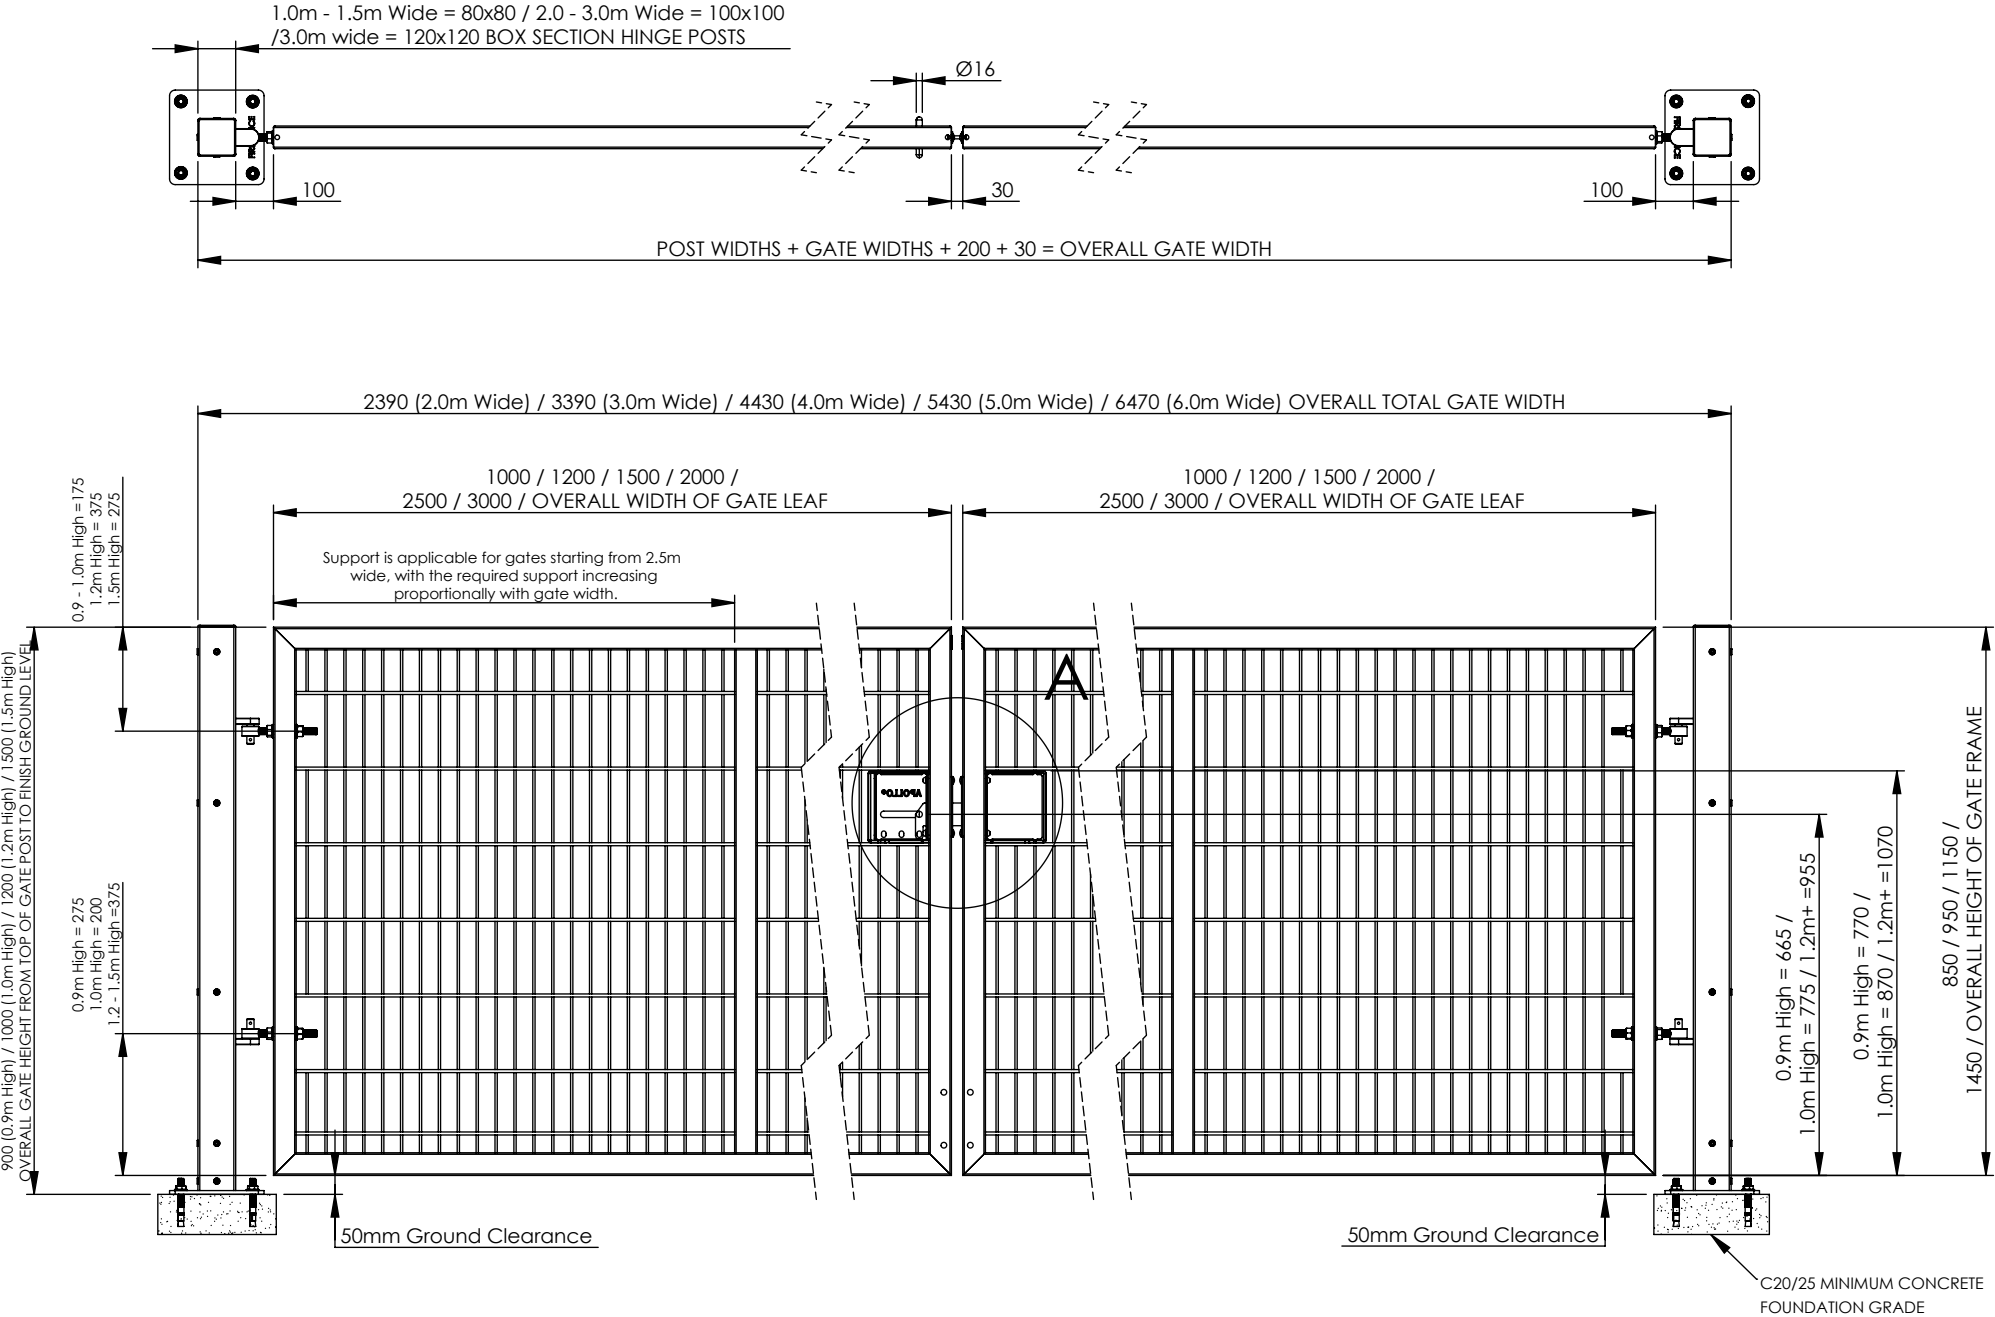

Thanks to the centrally welded mesh and the ability to mount the lock kit on either side, these kits provide maximum flexibility for various gate configurations.

4mm Thick Plate Slider Cover


4mm Thick Blanking Plate

8mm Thick Slider Bar

The Apollo Lock Kits offer a universal solution for gate installations, allowing both right-hand and left-hand hanging.

DETAIL A

Min OF 4 NO. M16x125mm ANCHOR BOLTS FITTED IN ACCORDANCE WITH MANUFACTURERS INSTRUCTIONS.

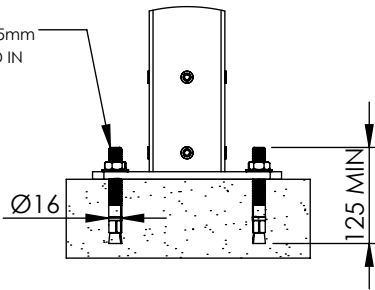


DETAIL B


Notes:

1. All materials to be mild steel and conform to relevant British standards.
2. All items to be pre-galvanised to BS EN 10346 or hot dip galvanised to ISO 1461.
3. Items can be powder coated on request, powder coating to : BS EN 13438
4. installation via R.A.M.S

ALL GATE HINGE POST & GATE LEAFS HAVE A Ø13 FOR A GATE RESTRAINER TO BE FITTED APON PURCHASE

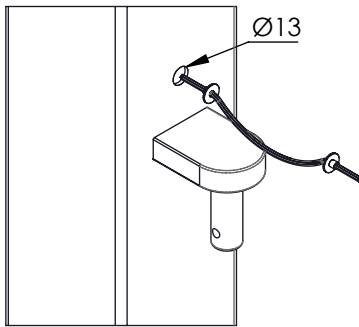

ALL GATES TO COME WITH UNISLIDE DOUBLE SLIDER KIT

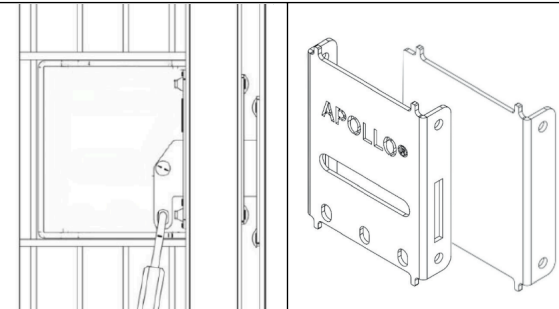


PART A
UNI-KIT-0500
Unislide Double Slider
Padlockable Gate Kit

PART B
APOL-ACC-0800
Apollo® Double Slider
Plate Kit

Other Lock Kits are available on request
(Click here for more information)

All gates come with 18mm Eye Bolts. Hinge posts are to be fitted with 2 x M18 eye bolts.

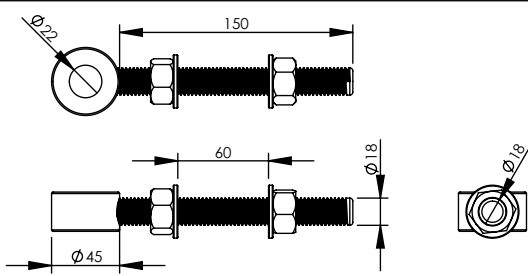

NAME	DATE
DRAWN W.P	29/05/2025
APV'D	
Tolerance	0 - 50mm ± 0.2mm > 50 - 500mm ± 1mm >1000mm ± 3mm



Material: Steel

WEIGHT: N/A

REV	DESCRIPTION	DATE
-----	-------------	------

FirstFence®
HIRE & SALES

SKU:

APOLLO®

TITLE: APOLLO® 0.9m x 1.5m High - 2.0m x 6.0m WIDE DOUBLE LEAF BOLT DOWN GATE KIT RANGE DRAWING

REV
A
A3

SCALE: N/A

SHEET 2 OF 2