



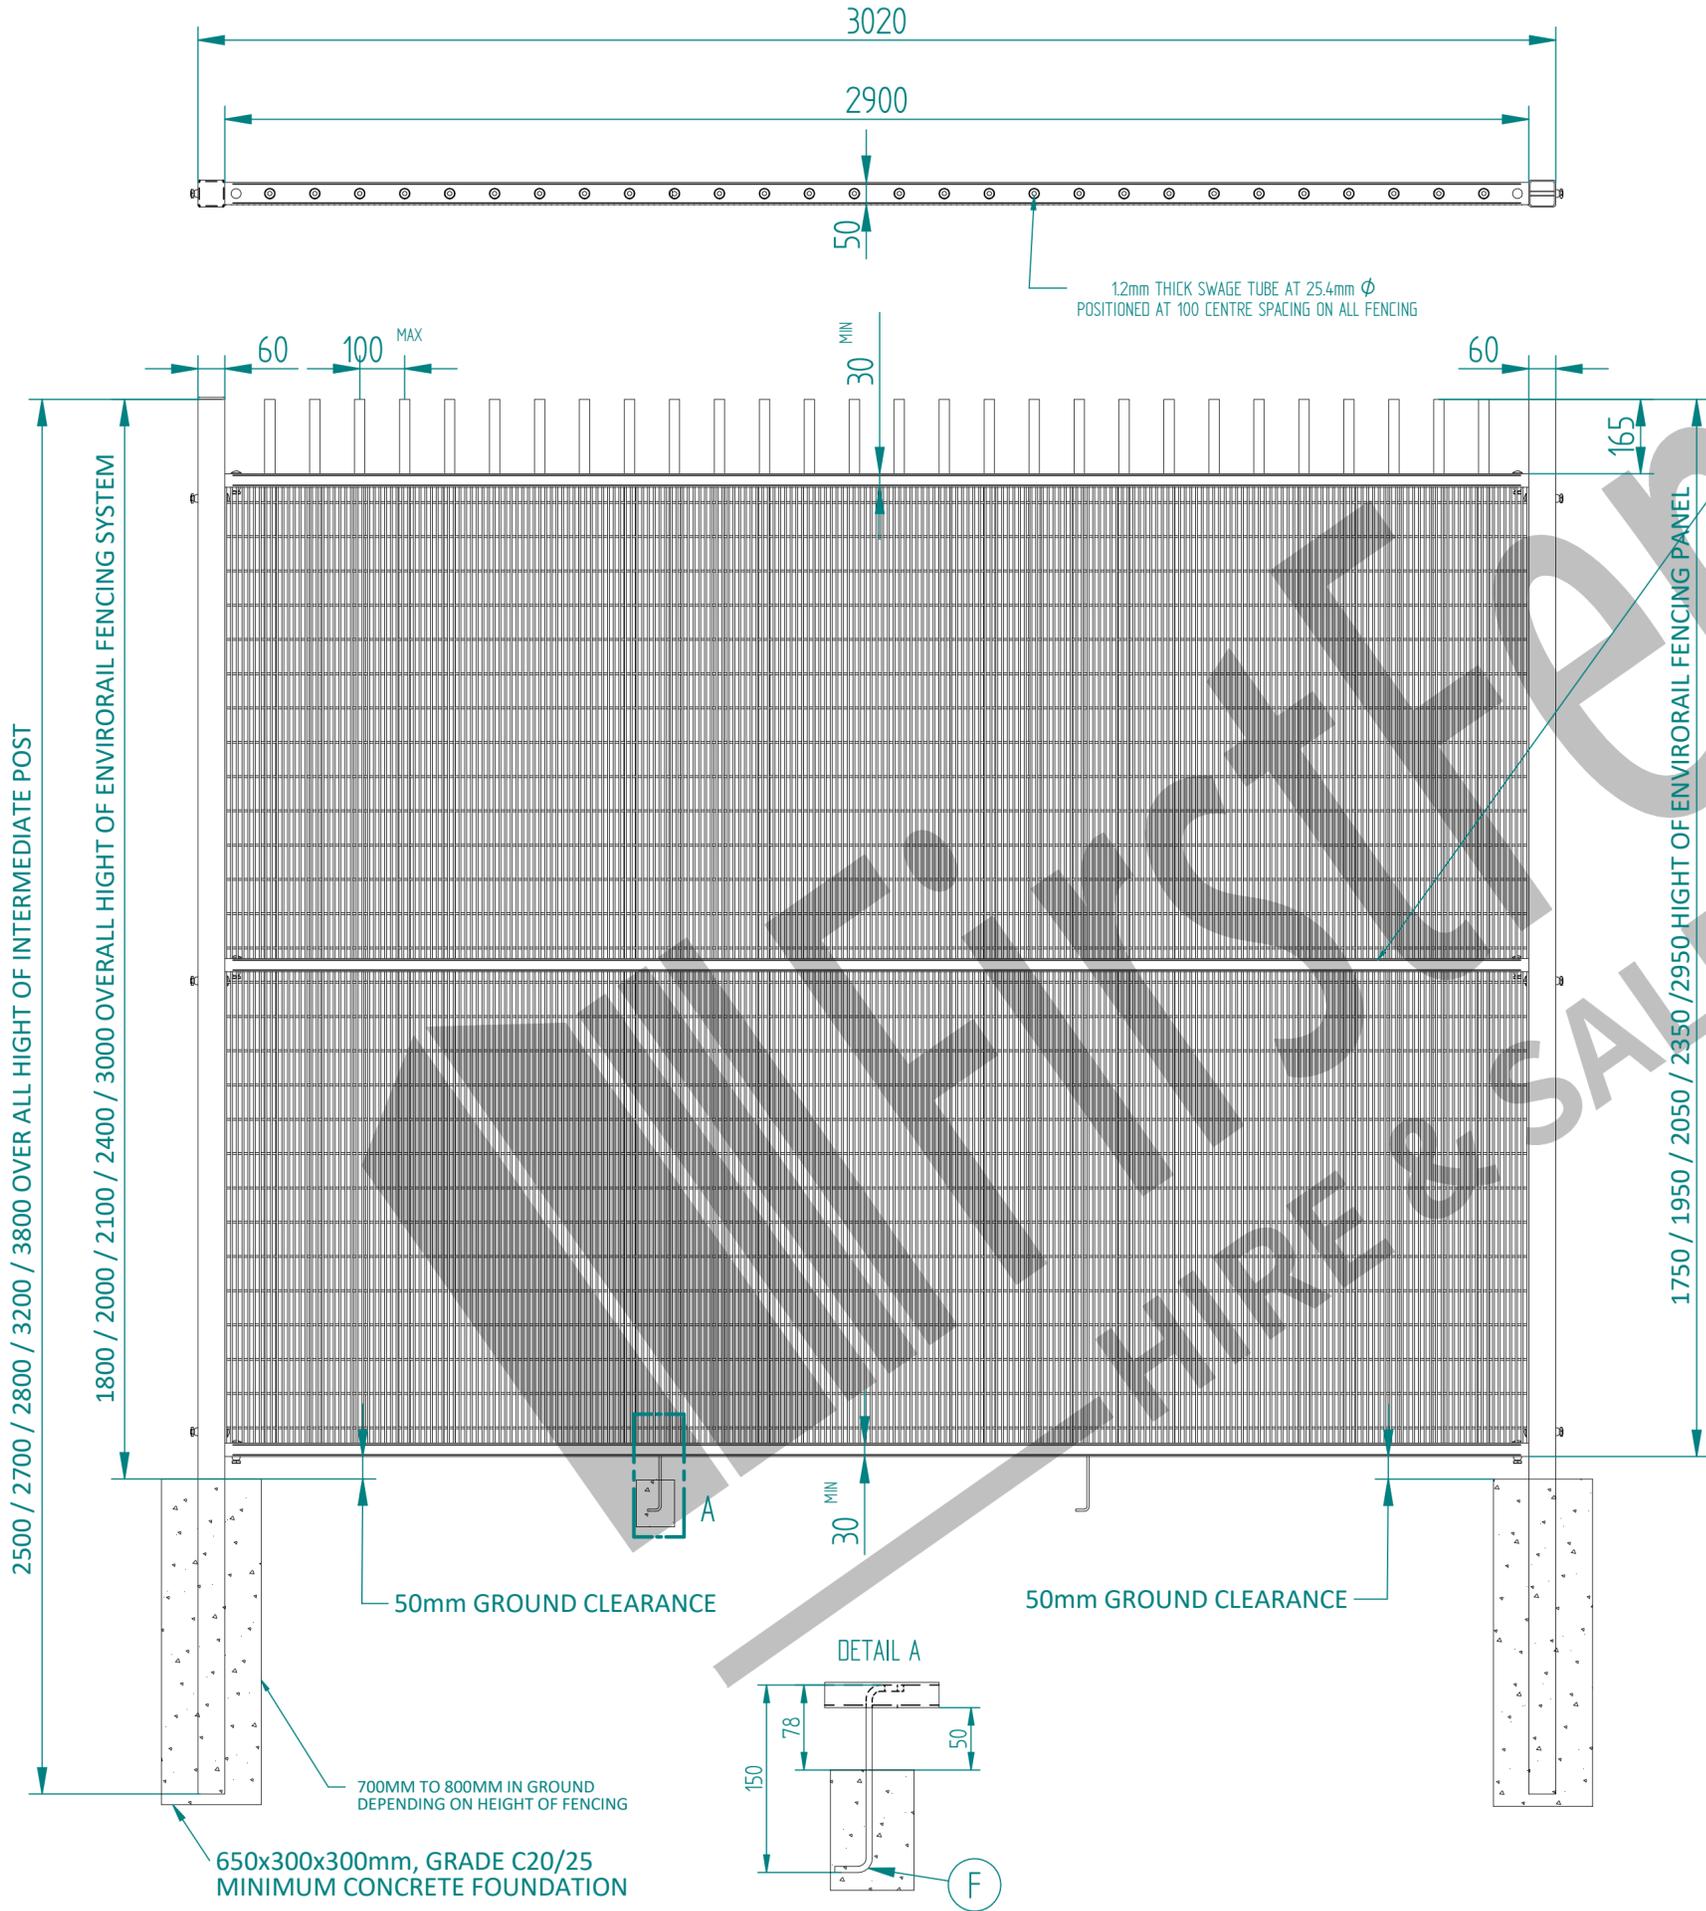


NOTES:

- ALL MATERIALS TO BE MILD STEEL AND CONFORM TO RELEVANT BRITISH STANDARDS.
- ALL ITEMS TO BE PRE-GALVANISED TO BS EN 10346 OR HOT DIP GALVANISED TO ISO 1461
- ITEMS CAN BE POWDER COATED ON REQUEST, POWDER COATING TO : BS EN 13438
- INSTALLATION VIA R.A.M.S
- ALL PALE FIXINGS ARE PATCH TREATED & GALVANISED

ALL POSTS ARE TO BE FITTED WITH BLACK PLASTIC INSERTS



MIDRAIL APPLICABLE ON ALL HEIGHTS ALWAYS POSITIONED CENTRAL TO TOP AND BOTTOM RAIL TO STOP BENDING OF TUBE

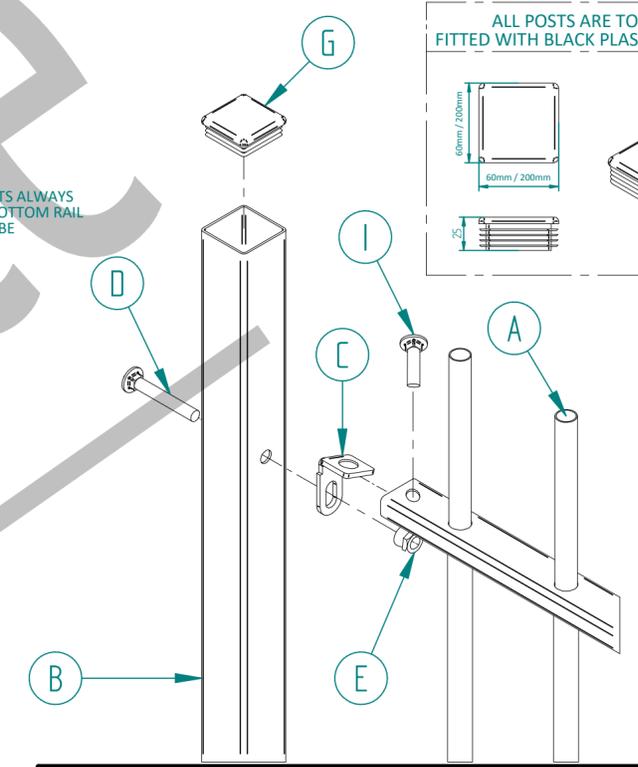



Item	Component Name	Quantity
A	EnviroProtect® Anti-Climb - PRE GALVANISED ENVIRORAIL VERTICAL BAR FENCING PANEL	1
B	EnviroProtect® Anti-Climb - DIG IN FENCING POST 60x60x3mm BOX SECTION	2
C	EnviroProtect® Anti-Climb - TWIST CLEAT	6
D	EnviroProtect® Anti-Climb - M10 x 80mm CUP HEAD BOLTS PATCH TREATED GALV	6
E	EnviroProtect® Anti-Climb - M10 SNAP OFF NUT GALV FOR SECURITY BOLTS	12
F	EnviroProtect® Anti-Climb - PRE GALV ENVIRO RAILING SUPPORT LEG FOR PANEL	2
G	EnviroProtect® Anti-Climb - 60 x 60 BLACK RIBBED INSERTS	2
H	EnviroProtect® Anti-Climb - M16 x 125mm GROUND ANCHOR BZP	8
I	EnviroProtect® Anti-Climb - M10 x 45mm CUP HEAD BOLTS PATCH TREATED GALV	6
J	EnviroProtect® Anti-Climb - 358 MESH CUT TO SIZE	2

NAME	DATE	TITLE
LT	16/02/24	EnviroProtect® Anti-Climb 1.8m x 3.0 High - 2.9M WIDE DIG IN FENCING KIT
TOLERANCE	± 2mm Unless Stated Otherwise	First Fence Ltd, Kiln Way, Swadlincote, Derbyshire, DE11 8EA 01283 512 111 sales@firstfence.co.uk
SIZE	A2	
		NOTE: SHOULD ANY DISCREPANCIES BE FOUND WITH THIS DRAWING, PLEASE INFORM FIRSTFENCE. COPYRIGHT OF THIS DRAWING IS OWNED BY FIRSTFENCE LIMITED. WEIGHT: N/A
		REV A

NOTES:





- ALL MATERIALS TO BE MILD STEEL AND CONFORM TO RELEVANT BRITISH STANDARDS.
- ALL ITEMS TO BE PRE-GALVANISED TO BS EN 10346 OR HOT DIP GALVANISED TO ISO 1461
- ITEMS CAN BE POWDER COATED ON REQUEST, POWDER COATING TO : BS EN 13438
- INSTALLATION VIA RAMS
- ALL PALE FIXINGS ARE PATCH TREATED & GALVANISED

ALL POSTS ARE TO BE FITTED WITH BLACK PLASTIC INSERTS

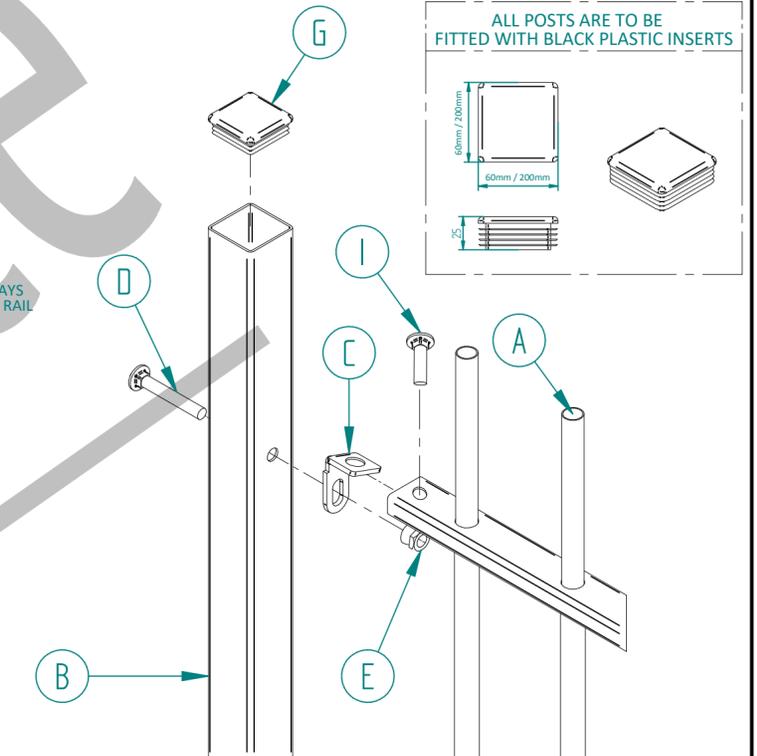

Item	Component Name	Quantity
A	EnviroProtect® Anti-Climb - PRE GALVANISED ENVIRORAIL VERTICAL BAR FENCING PANEL	1
B	EnviroProtect® Anti-Climb - BOLT DOWN FENCING POST 60x60x3mm BOX SECTION	2
C	EnviroProtect® Anti-Climb - TWIST CLEAT	6
D	EnviroProtect® Anti-Climb - M10 x 80mm CUP HEAD BOLTS PATCH TREATED GALV	6
E	EnviroProtect® Anti-Climb - M10 SNAP OFF NUT GALV FOR SECURITY BOLTS	12
F	EnviroProtect® Anti-Climb - PRE GALV ENVIRO RAILING SUPPORT LEG FOR PANEL	2
G	EnviroProtect® Anti-Climb - 60 x 60 BLACK RIBBED INSERTS	2
H	EnviroProtect® Anti-Climb - M16 x 125mm GROUND ANCHOR BZP	8
I	EnviroProtect® Anti-Climb - M10 x 80mm CUP HEAD BOLTS PATCH TREATED GALV	6
J	EnviroProtect® Anti-Climb - 358 MESH CUT TO SIZE	2

NAME	DATE	TITLE
LT	16/02/24	ENVIORAIL TITAN AC 1.8m x 3.0 High - 2.9M WIDE BOLT DOWN FENCING KIT
TOLERANCE	± 2mm Unless Stated Otherwise	First Fence Ltd, Kiln Way, Swadlincote, Derbyshire, DE11 8EA 01283 512 111 sales@firstfence.co.uk
3RD ANGLE		
SIZE	A2	REV A
WEIGHT: N/A		SHEET 2 OF 8

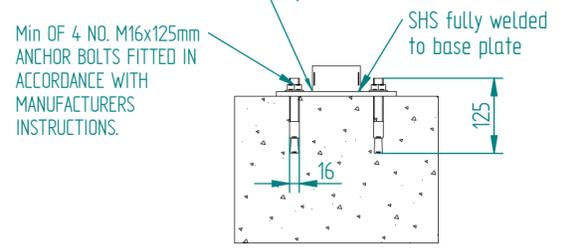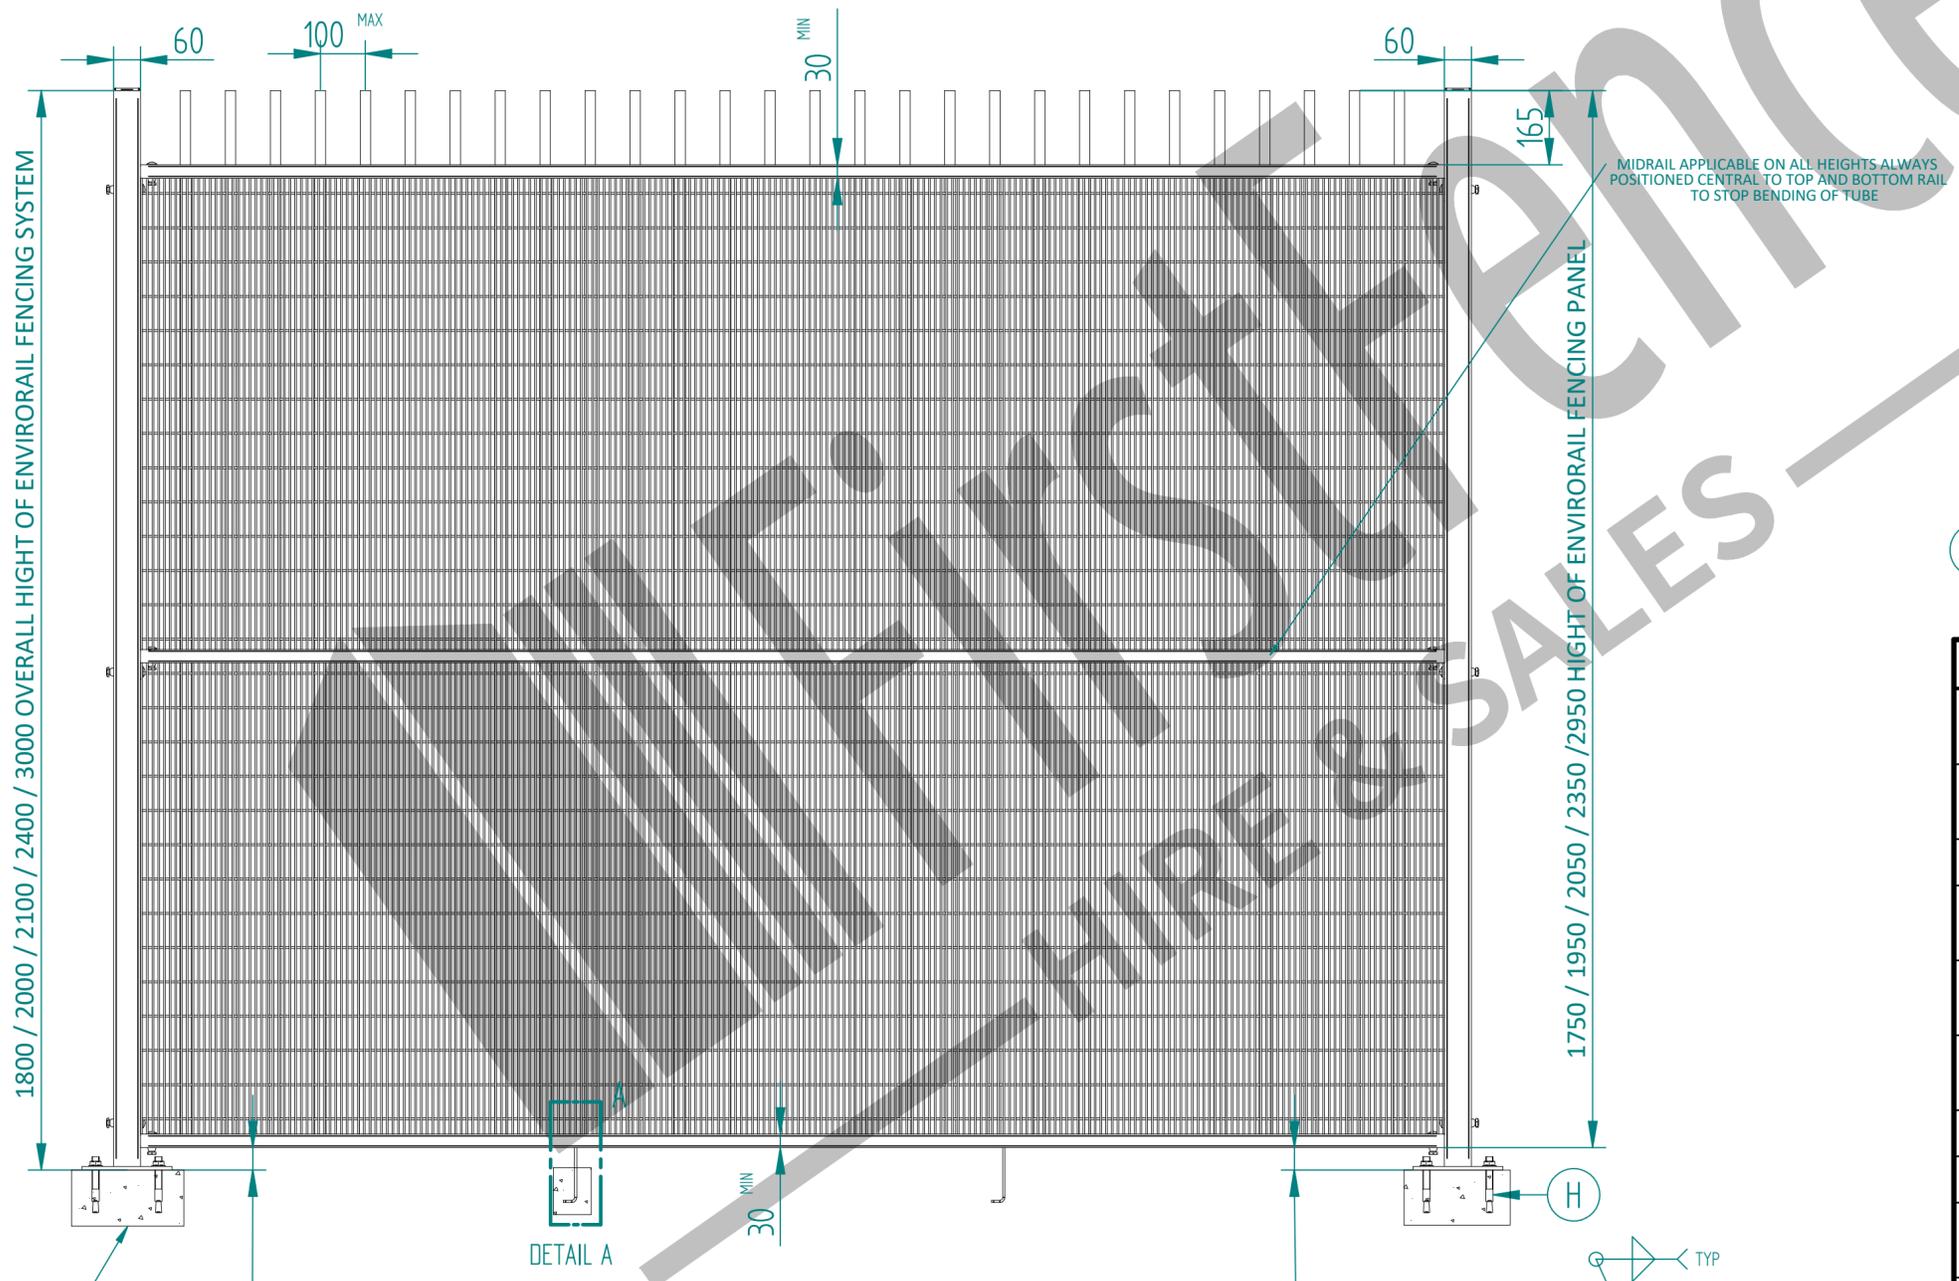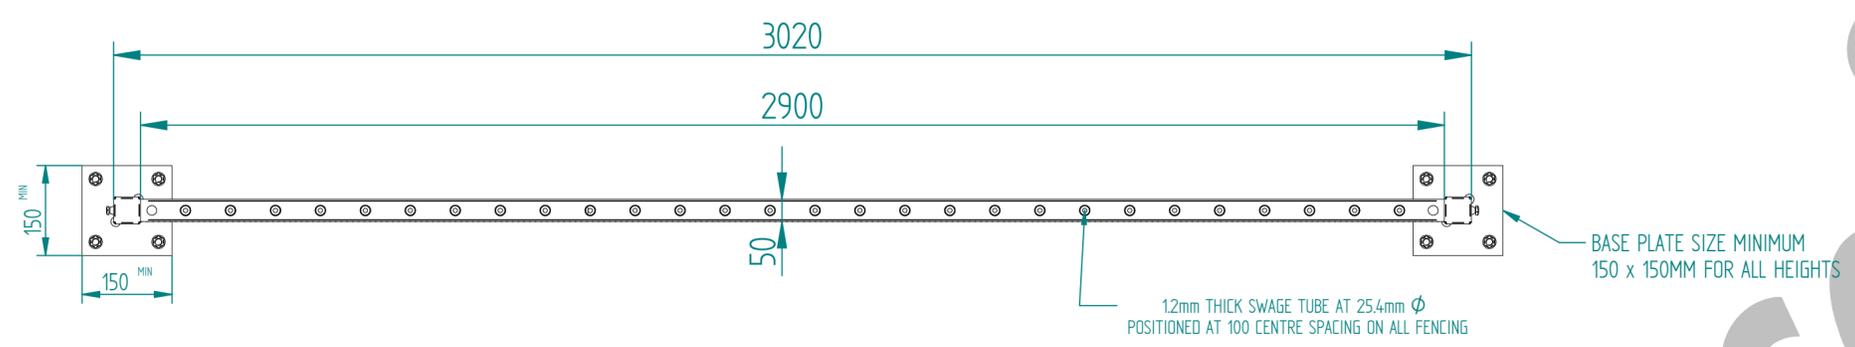


EnviroProtect® Anti-Climb - END POST CONFIGURATION



NOTES:

- ALL MATERIALS TO BE MILD STEEL AND CONFORM TO RELEVANT BRITISH STANDARDS.
- ALL ITEMS TO BE PRE-GALVANISED TO BS EN 10346 OR HOT DIP GALVANISED TO ISO 1461
- ITEMS CAN BE POWDER COATED ON REQUEST, POWDER COATING TO : BS EN 13438
- INSTALLATION VIA R.A.M.S
- ALL PALE FIXINGS ARE PATCHED TREATED & GALVANISED

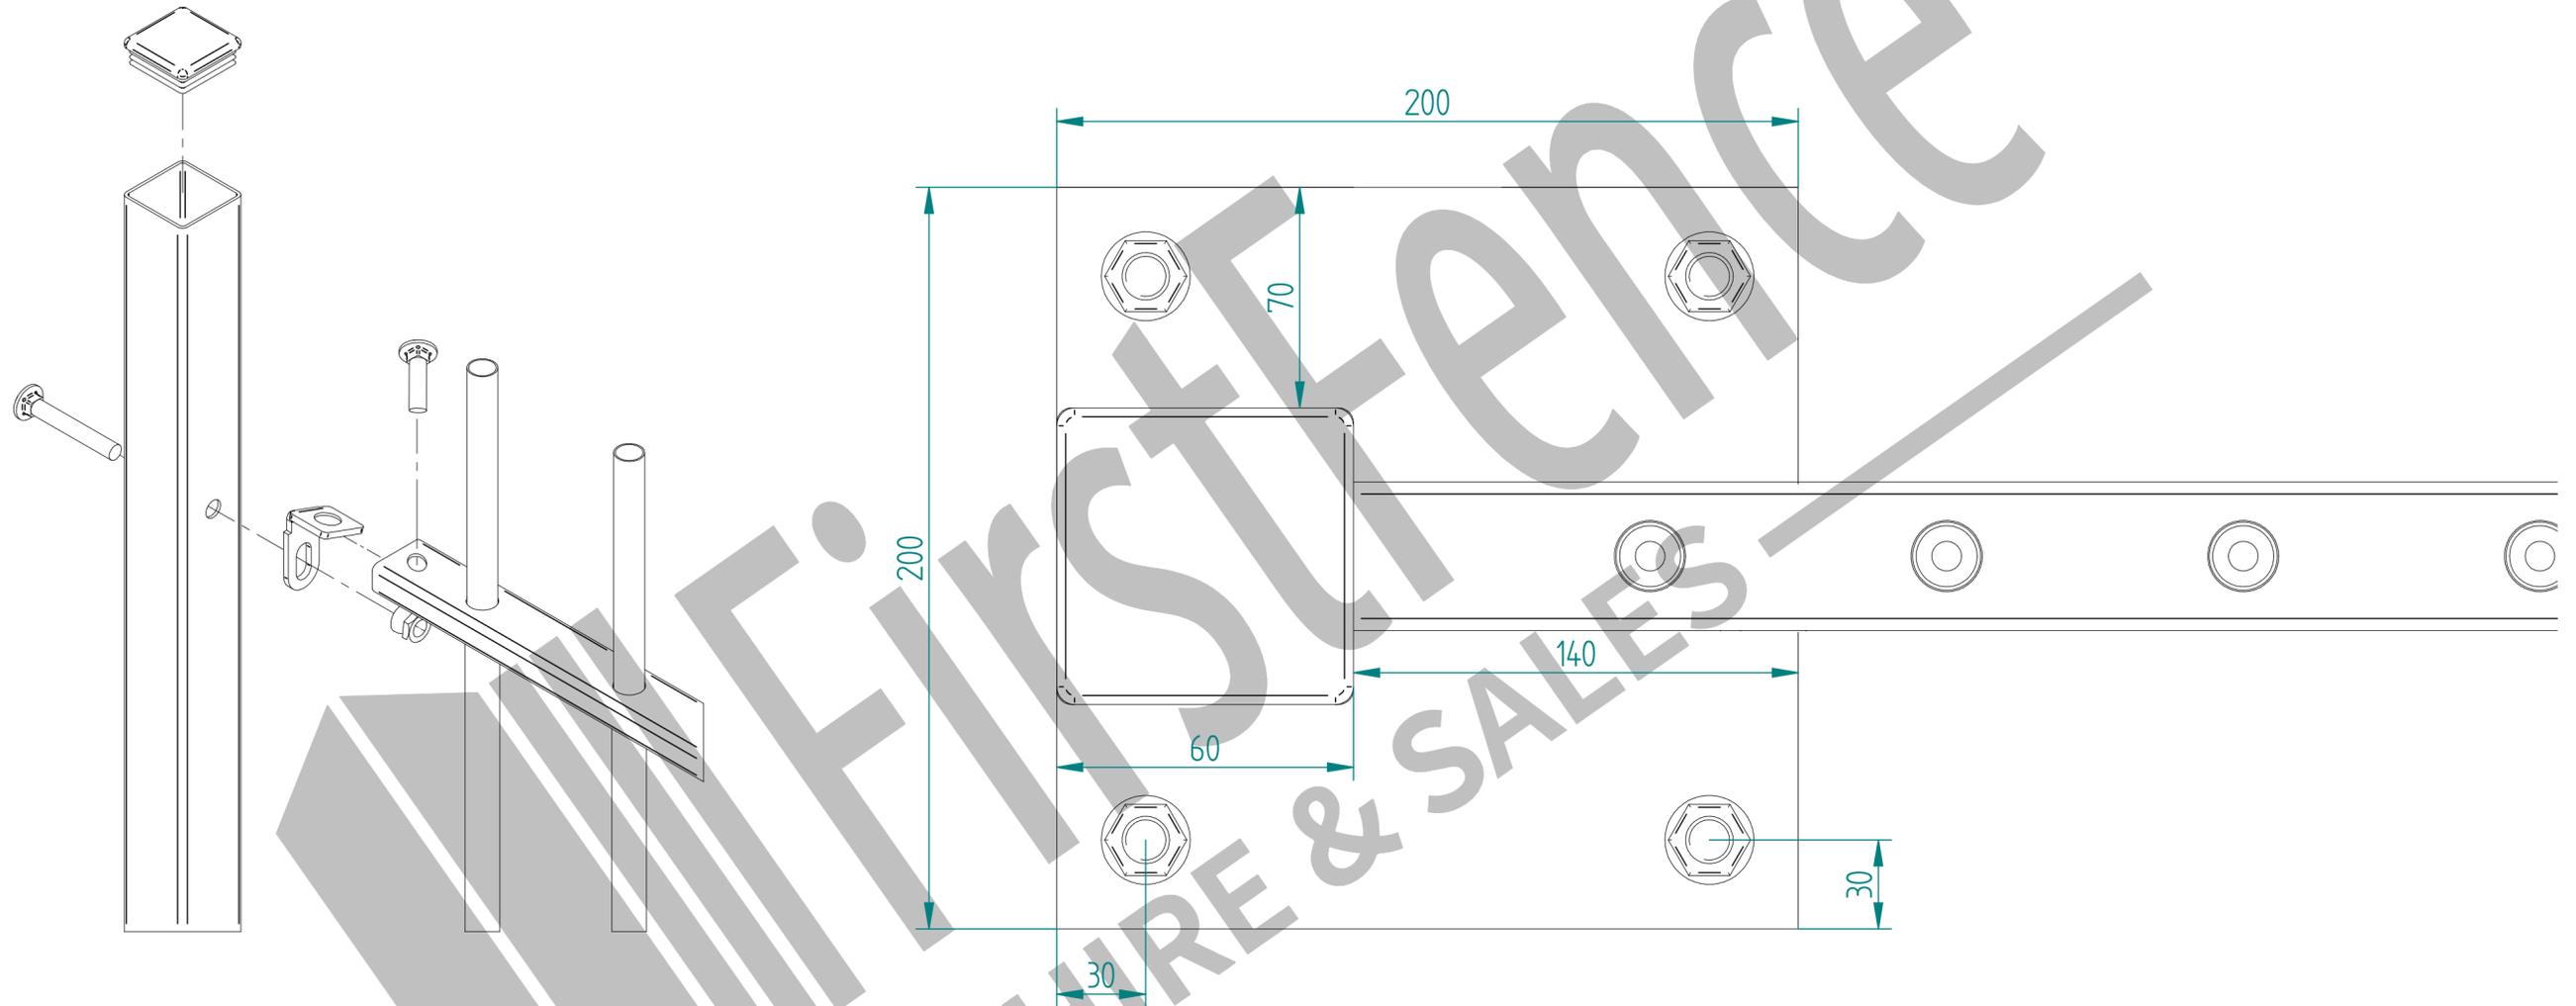

EnviroProtect® Anti-Climb - END POST CONFIGURATION



	NAME	DATE	TITLE
DRAWN	LT	16/02/24	EnviroProtect® Anti-Climb 1.8m x 3.0 High - 2.9M WIDE FENCING KIT
TOLERANCE	± 2mm Unless Stated Otherwise		First Fence Ltd, Kiln Way, Swadlincote, Derbyshire, DE11 8EA 01283 512 111 sales@firstfence.co.uk
3RD ANGLE			
SIZE A2			REV A
WEIGHT: N/A			SHEET 4 OF 8

EnviroProtect® Anti-Climb - CORNER POST CONFIGURATION



NOTES:

- ALL MATERIALS TO BE MILD STEEL AND CONFORM TO RELEVANT BRITISH STANDARDS.
- ALL ITEMS TO BE PRE-GALVANISED TO BS EN 10346 OR HOT DIP GALVANISED TO ISO 1461
- ITEMS CAN BE POWDER COATED ON REQUEST, POWDER COATING TO : BS EN 13438
- INSTALLATION VIA R.A.M.S
- ALL PALE FIXINGS ARE PATCHED TREATED & GALVANISED

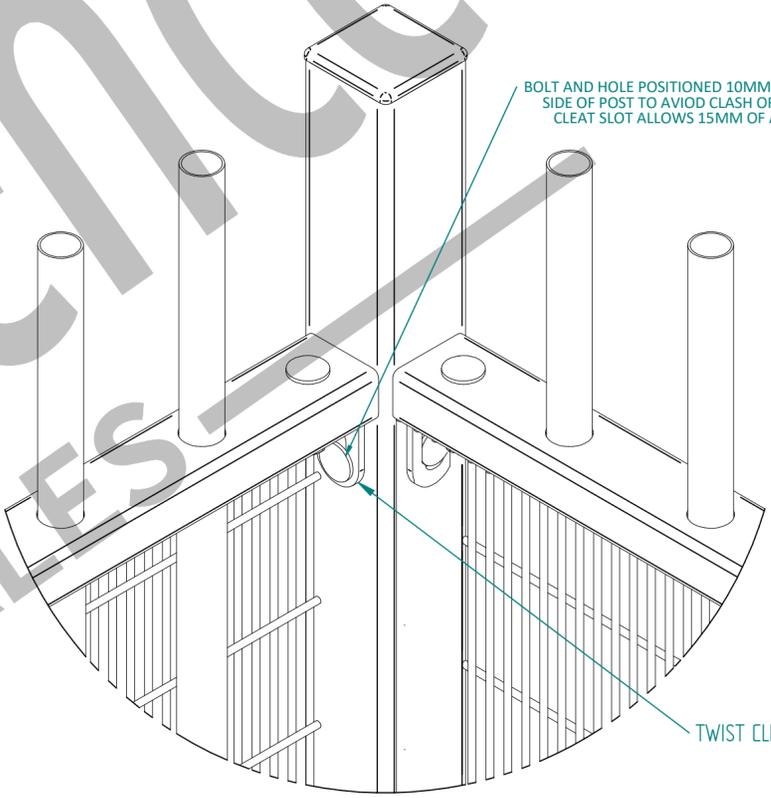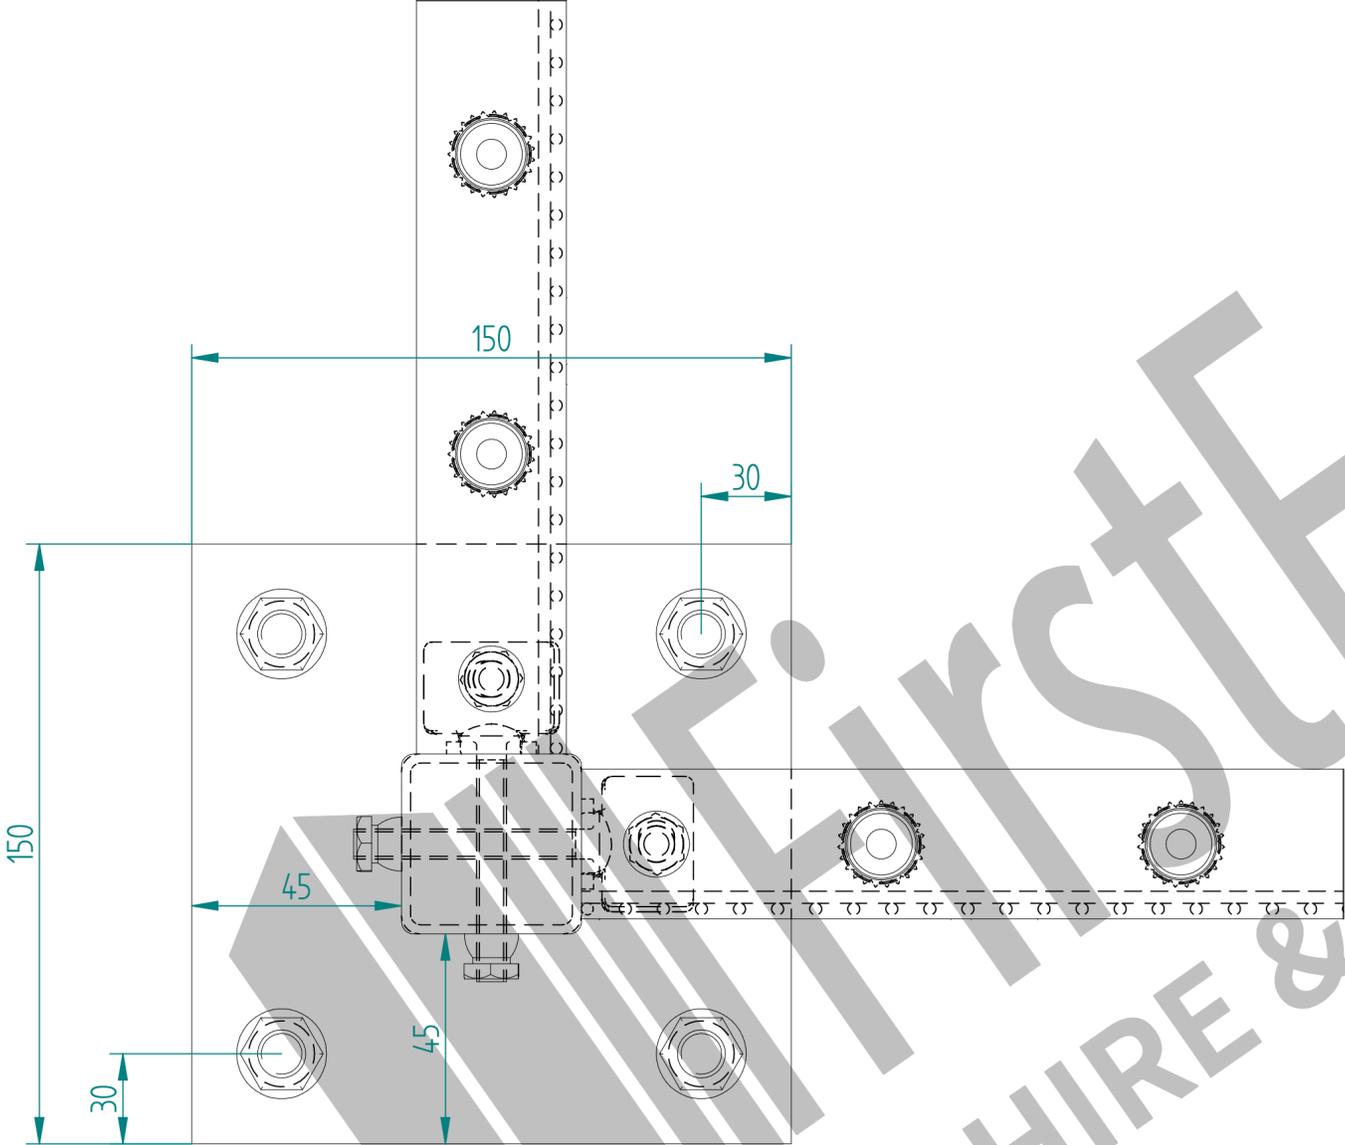

EnviroProtect® Anti-Climb - CORNER POST CONFIGURATION

	NAME	DATE	TITLE
DRAWN	LT	16/02/24	EnviroProtect® Anti-Climb 1.8m x 3.0 High - 2.9M WIDE FENCING KIT
TOLERANCE	± 2mm Unless Stated Otherwise		First Fence Ltd, Kiln Way, Swadlincote, Derbyshire, DE11 8EA 01283 512 111 sales@firstfence.co.uk
	3RD ANGLE		
	SIZE	A2	REV A
	WEIGHT:	N/A	SHEET 5 OF 8