

Key Features

- ⊙ **IP 67 Rated**
Waterproof design allows these bollards to operate even in poor weather conditions
- ⊙ **Fast Deployment**
Capable of raising or lowering in as little as 5 seconds
- ⊙ **Ideal for use in High Traffic Areas**
The Pillar B 600 Automatic Bollards are capable of up to 3000 operational cycles per day
- ⊙ **Operation in Hot & Cold Conditions**
Capable of operating in temperatures from -40 °C to 60 °C

Suitable For

- ⊙ **Private Driveways**
- ⊙ **Pedestrianised areas in towns and cities**
- ⊙ **Car Parks**
- ⊙ **Industrial sites**
- ⊙ **Commercial locations**



Control system Available

Control up to 4 Pillar B 600 hydraulic bollards with a BFT Perseo control panel, allowing multiple bollards to be lowered or raised at the same time (included with the single kits)



Corrosion Resistant

Each of these Bollards features an outer casing with either a stainless steel or RAL 7015 Grey finish, helping to protect against rust and corrosion



Available in 2 Safety and Security Variants

Available in two fail safe variants, Fail Safe and Fail Secure
Fail Secure is ideal for high security areas, as the shaft will rise in the event of a power failure
Fail Safe is more suited to public locations as the bollards will drop in the event of a power failure.




High Visibility

Each Pillar B 600 automated bollard features a high visibility reflective strip as well as a series of LED lights found around the top of the bollard.

Specifications

Shaft Height	600 mm
Shaft Diameter	275 mm
Raising Time	5 Seconds
Control Unit	Perseo CBD
Impact Resistance	20,000 Joule
Movement	Electromechanical
Frequency of use	3000 per/day
Limit Switch	Reed Magnetic Sensor
Manual Operation	Reversible with no power
Protection Rating	IP67
Temperature Range	-40°C to 60°C

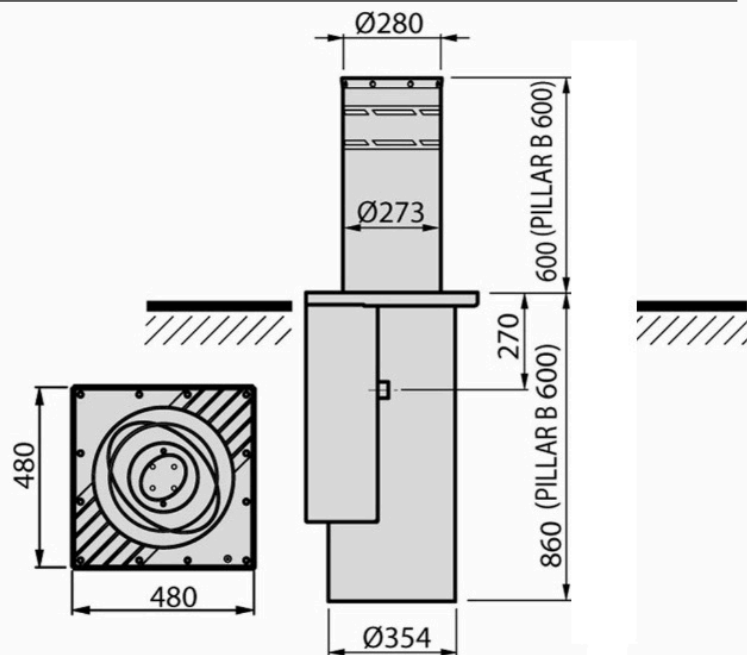

 Call our Expert Sales Team for more information

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA
01283 512 111 | www.firstfence.co.uk | sales@firstfence.co.uk

Bristol | Canvey | Glasgow | Nottingham | Tipton