

Key Features

- ⊙ **IP 67 Rated**
Waterproof design allows these bollards to operate even in poor weather conditions
- ⊙ **Fast Deployment**
Capable of raising or lowering in as little as 7 seconds
- ⊙ **Suitable for Medium to High Traffic Areas**
Each Stoppy B 500 Bollard is capable of up to 500 cycles a day
- ⊙ **Operation in Hot & Cold Conditions**
Capable of operating in temperatures from -20 °C to 60 °C

Suitable For

- ⊙ **Private Driveways**
- ⊙ **Pedestrianised areas in towns and cities**
- ⊙ **Car Parks**
- ⊙ **Industrial sites**
- ⊙ **Commercial locations**



Control system Available

Control up to 4 Stoppy B 500 bollards with a BFT Perseo control panel, allowing multiple bollards to be lowered or raised at the same time (included with the single kits)



Corrosion Resistant

Each of these Bollards features an outer casing with either a stainless steel or RAL 7015 Grey finish, helping to protect against rust and corrosion



Lockable

Each of the Stoppy B 500 Electromechanical bollards features an electric brake system which keeps the bollard in its current position, preventing tampering even in the event of power failure.




High Visibility

Each Stoppy B 500 automated bollard features a high visibility reflective strip as well as a series of LED lights found around the top of the bollard.

Specifications

Weight	55 kg
Shaft Height	500 mm
Shaft Diameter	115 mm
Raising Time	7 Seconds
Control Unit	Perseo CBD
Breaking Resistance	6,000 Joule
Movement	Electromechanical
Frequency of use	500 per/day
Limit Switch	Reed Magnetic Sensor
Manual Operation	Reversible with no power
Protection Rating	IP67
Temperature Range	-20°C to 60°C

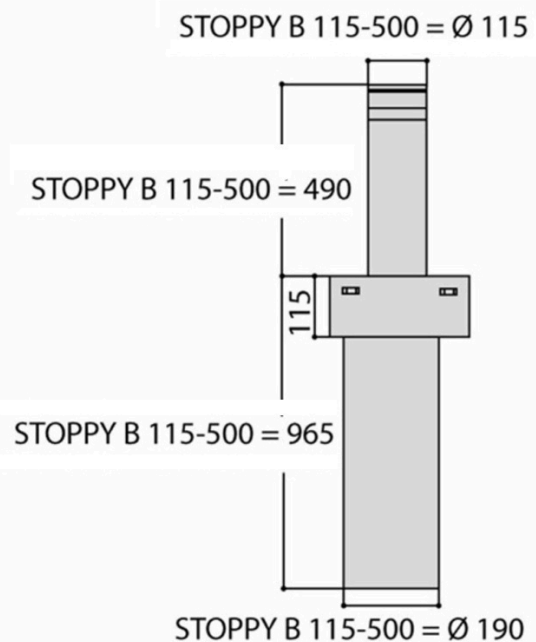

 Call our Expert Sales Team for more information

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA
01283 512 111 | www.firstfence.co.uk | sales@firstfence.co.uk

Bristol | Canvey | Glasgow | Nottingham | Tipton