Surface mounted locks


LPKQU2

https://www.locinox.com/en-gb/gate-hardware/locks/surface-mounted-locks/d00000008

Stainless steel superior anti-panic lock with aluminium housing. EN179 certified configuration possible with LPKQ U2 for 40 & 60 mm gate frames with SAKL keep, 3006A-2 handle and 3012-54-STD-cylinder. Escape or exit from inside is possible at all times by operating the handle. Mechanical access from the outside is always possible by operating the cylinder. The 20 mm continuous adjustability of the bolts allows a perfect latching / locking of the mechanism. A solid stainless steel deadbolt with a 23 mm throw guarantees a secure locking. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.



Secured by Design
Police Preferred Specification

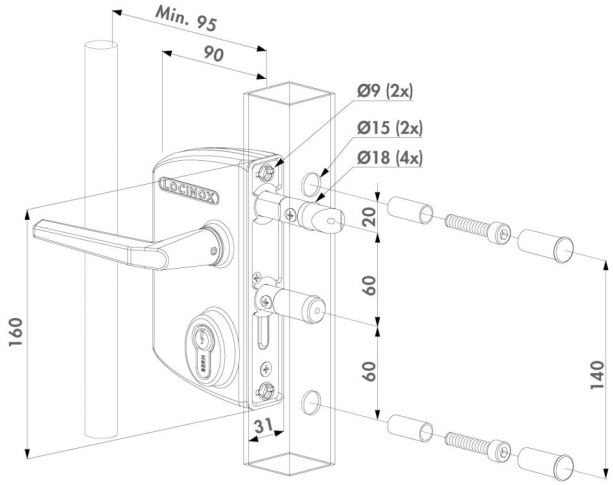

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Hexagon Nuts (HEX 5) + Spacers
Daybolt Adjustability	20 mm
Nightbolt Adjustability	20 mm
Key-operated Self-Latching Bolt	Yes
Throw	Nightbolt 23 mm
Follower Size	Square 8 mm
Profile Type	Square
Cylinder Type	Euro Profile
Cylinder Length	54 mm
Materials Main Part(s)	KTL And Spray Coated Aluminium Housing
	Stainless Steel Mechanism
Norms	ISO 9227 KTL
	EN 179
Hours of Salt Spray Testing	1000
Test Frequency	500000
Years of Warranty	3