LOCINOX


Surface mounted locks

LDKZD1

https://www.locinox.com/en-gb/gate-hardware/locks/surface-mounted-locks/d00000006

High-quality swing gate lock with aluminium housing and stainless steel mechanism with 2 cylinders. You only need to use 1 of the cylinders in order to open or to close the lock. This lock is ideal to provide entry to third parties like firemen or waste collectors. The double locking of the solid stainless steel night bolt ensures a secure closing. For a fast and highly precise installation, we recommend using the Drill-Fix drilling jig.



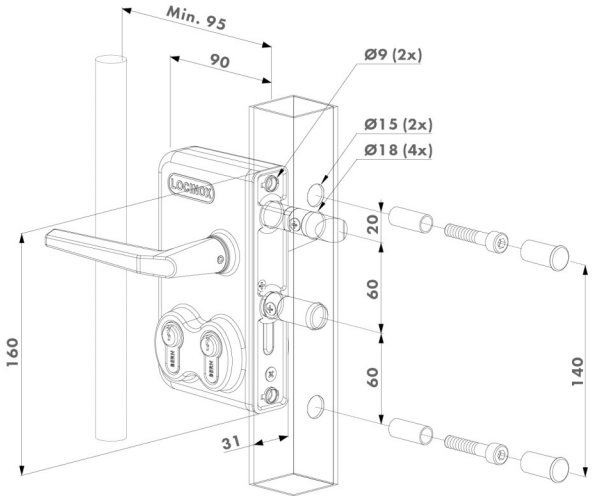

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Hexagon Nuts (HEX 5) + Spacers
Key-operated Self-Latching Bolt	Yes
Throw	Nightbolt 23 mm
Follower Size	Square 8 mm
Profile Type	Flat
	Round
	Square
Cylinder Type	Euro Profile
Cylinder Length	54 mm
Materials Main Part(s)	KTL And Spray Coated Aluminium Housing
	Stainless Steel Mechanism
Norms	ISO 9227 KTL
Hours of Salt Spray Testing	1000
Test Frequency	500000
Years of Warranty	3