LOCINOX


For standard locks

SF

https://www.locinox.com/en-gb/gate-hardware/keeps/for-standard-locks/d00000050

Aesthetical surface mounted keep. Specially designed for our complete range of surface mounted swing gate locks. The limited 8 mm visible thickness ensures a discreet look. A highly efficient assembly with minimal gate preparations is guaranteed, while the unique Quick-Fix ensures a fast and strong fixation on the gate. This unique keep in combination with the gate lock ensures a strong gate anchoring.



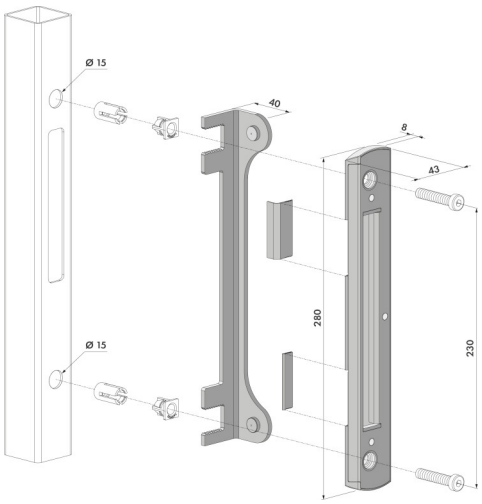

TECHNICAL SPECIFICATIONS

Left-Right Adjustability	Yes
Installation Method	Hexagon Screws (HEX 5)
	Quick-Fix
Minimal Distance Gate - Post	13 mm
Materials Main Part(s)	Aluminium
	Polypropylene
	Stainless Steel
Hours of Salt Spray Testing	500
Test Frequency	500000
Years of Warranty	3