


# GBMU



<https://www.locinox.com/en-gb/gate-hardware/hinges/industrial-gates/d00000076>

3-way adjustable hot-dip galvanized 180° hinge. Depth and spacing between gate and post are adjustable after installation. The welding parts are available in black steel or zinc plated.

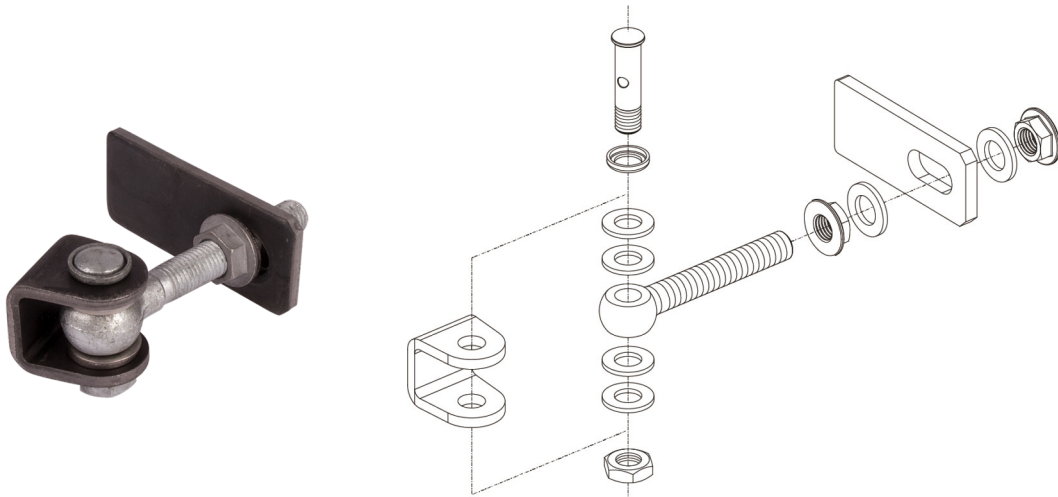

## TECHNICAL SPECIFICATIONS

<b>Minimal Distance Gate - Post</b>	6 mm; 8 mm; 12 mm
<b>Gate Weight</b>	100 kg 200 kg 250 kg 400 kg 440 kg
<b>Horizontal Adjustability</b>	M12: 41 mm M16: 51/91 mm M18: 36/82 mm M20: 55/65 mm M22: 61/76 mm
<b>Vertical Adjustability</b>	x
<b>Materials Main Part(s)</b>	Hot Dip Galvanised Steel Steel
<b>Hours of Salt Spray Testing</b>	500
<b>Test Frequency</b>	500000
<b>Years of Warranty</b>	3