



GL-220 Waterproof Gate Lock Series

Special features


- Holding force: 1200lbs(500Kg).
- Power Supply: DC12V or DC24V (adjustable)

- Suitable for Exit door ,Out-swing door and In-swing door.
- Fail safe type. Stainless steel casesuitable for outdoors.
- Special surface enhancement process which is anti-rust for its durability.
- For use with any types of the access control unit with built-in surge absorber to prevent any interference to the reader.
- Low power consumption with high ef ciency, nosie-free and instant demagnetizer when power is o .

Speci cation


Power Supply	DC 12V or DC24V $\pm 15\%$
Operation current	460mA@12VDC mA $\pm 5\%$ 220mA@24VDC mA $\pm 5\%$
Application	90° push/pull door
Holding forces	1200lbs(500Kg)
Lock status sensor	N.C. Output 0.25mA (Reed switch)
Demagnetizer design	Instant demagnetizer when power is off.
Operation temperature	40°C $\pm 5^\circ\text{C}$ (Room temperature 30 °C)
Weight	4900g (included wrapping)

Dimensions

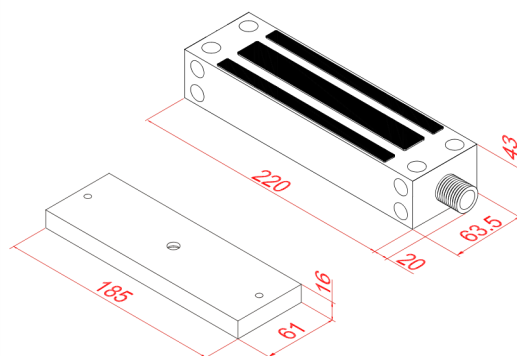

Unit: mm

Related products

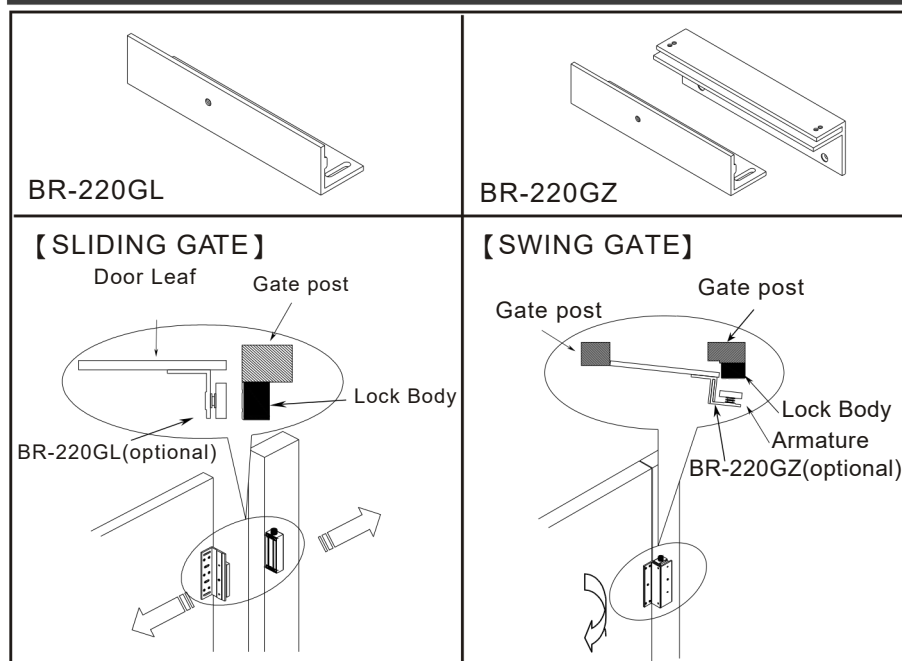

Structure diagram

