



Raising Standards  
Advancing Safety

 Call our Expert Sales Team for more information

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA

01283 512 111 | [www.firstfence.co.uk](http://www.firstfence.co.uk) | [sales@firstfence.co.uk](mailto:sales@firstfence.co.uk)



### Key Features

- ✔ **Safety**  
(Safe, controlled closing everytime)
- ✔ **Fail Safe / Fail Close**  
(remains locked or unlocked during power failure)
- ✔ **Corrosion Resistant**  
(Galvanised and PPC to ISO and BS EN standards)

### Suitable For

- ✔ **Industrial Sites**
- ✔ **Pedestrianised Zones**
- ✔ **Schools & Nurseries**
- ✔ **Guarded Car Parks**
- ✔ **Residential Entrances**



#### Safety

Complete with a Locinox hydraulic gate closer meaning your gate will close everytime safely and securely.




#### Corrosion Resistant

FFL 60P gates are hot-dip galvanised and polyester paint coated to secure against corrosion.



#### Fail Safe / Fail Close

FFL 60P gates can either be Fail Safe - meaning they remain unlocked during a power outage or Fail Close - when the power is off, the gate will stay locked and secure.



#### System-Based Solution

These gates are part of the full FFL range, including fully automatic and manual gates such as cantilever, tracked sliding, swing and bi-fold options.

## Specifications

Material	Galvanised steel (ISO 1461)
Infill	Vertical bar, 868 & 358 mesh or Palisade
Finish	Polyester powder coated (BS EN 13438)
Colour	A range of RAL colours is available
Post Type	Bolt Down - standard Dig In - optional

## Optional Extras




Locinox U-Safe - stainless steel safety cable



Anti-Climb Spikes

## What's Included:

- Bolt down posts (2x)
- Gate Leaf
- Locinox Hydraulic Gate Closer
- Locinox Maglock (Fail Open) or Electric Strike (Fail Close)
- Bolt-on Hinges (2x)

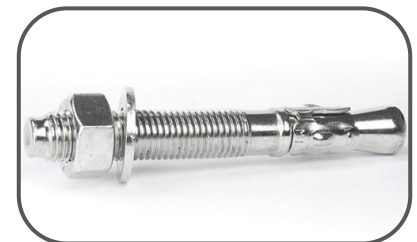

Galvanized, zinc plated ground anchor bolts

 Call our Expert Sales Team for more information

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA

01283 512 111 | [www.firstfence.co.uk](http://www.firstfence.co.uk) | [sales@firstfence.co.uk](mailto:sales@firstfence.co.uk)

## Hardware Explained

The FFL 60P gate system is designed for efficiency and ease. These gate systems come ready to install, with all components supplied with each gate kit.


### Infill Options

These gates have the option of 358 prison mesh, 868 twin mesh, palisade or a 25mm vertical bar infill, in order to fulfil more needs and purposes.



### Hydraulic Gate Closer

All FFL 60P gates come with a Locinox Samson2 Hydraulic Gate Closer, allowing for a simple set up and adjustable closing speeds.

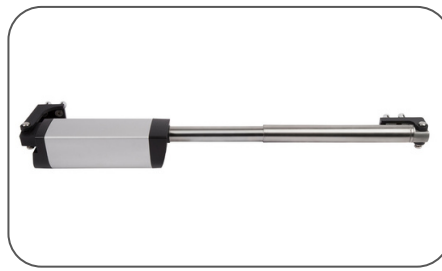

### Fail Open

The FFL 60P Fail Open option comes with a Locinox Mag3000 maglock with integrated handles, when power fails, the gate can be opened manually.




### Fail Close

The FFL 60P Fail Close option includes a standard Locinox lock and an electric strike, when power fails the electric strike prevents the gate from being opened.



### Bolt Down Posts

These gates come with 100mm posts, ready to bolt down using 4 x M16 ground anchor bolts per post (supplied separately). 120mm (M16) and 160mm (M20) posts also available.

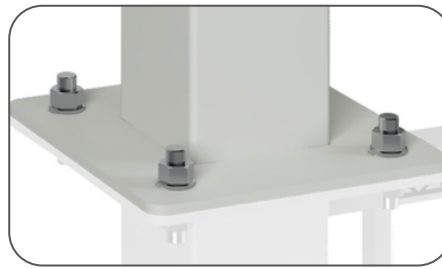


### Access Control

All FFL 60P gates can be fitted and operated using most popular access control devices, such as intercoms and keypads.



## Heights & Colours

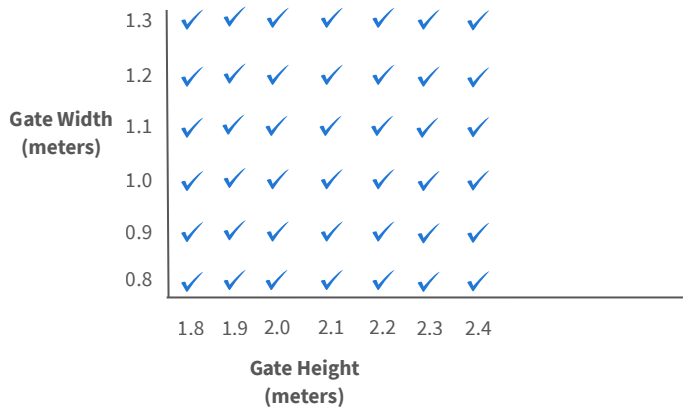

Available in standard RAL colours. Custom colours are available on request, as is a galvanised-only option




[Call our Expert Sales Team for more information](#)

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA

01283 512 111 | [www.firstfence.co.uk](http://www.firstfence.co.uk) | [sales@firstfence.co.uk](mailto:sales@firstfence.co.uk)

## Sizing

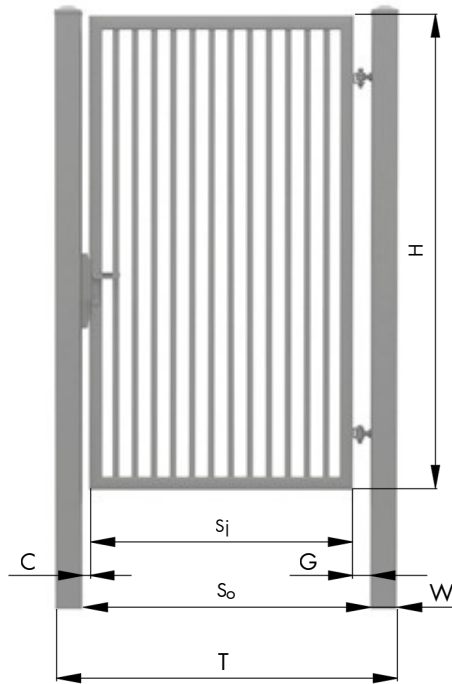

- So** - distance between posts (ordering size)
- Sj** - clear passage width with the gate installed
- C** - gate edge to post edge clearance
- G** - gate edge to post edge clearance
- H** - gate height (ordering size);
- T** - overall gate width with posts;
- W** - post size.

Ordered Width of Gate (So)	Gate height (mm) [H]	Clear Passage (mm)	Gate clearance to ground (mm)	Post dimensions	Post height (mm)	Required space (inc posts)
800 - 1300 mm	1800	So - 160	80	100x100	1820	So + 2000
	1900	So - 160	80	100x100	1920	So + 2000
	2000	So - 160	80	100x100	2020	So + 2000
	2100	So - 160	80	100x100	2120	So + 2000
	2200	So - 160	80	100x100	2220	So + 2000
	2300	So - 160	80	100x100	2320	So + 2000
	2400	So - 160	80	100x100	2420	So + 2000

120mm (M16) and 160mm (M20) posts also available.

 Call our Expert Sales Team for more information

First Fence Ltd | Kiln Way, Woodville, South Derbyshire, DE11 8EA

01283 512 111 | [www.firstfence.co.uk](http://www.firstfence.co.uk) | [sales@firstfence.co.uk](mailto:sales@firstfence.co.uk)